


11

30

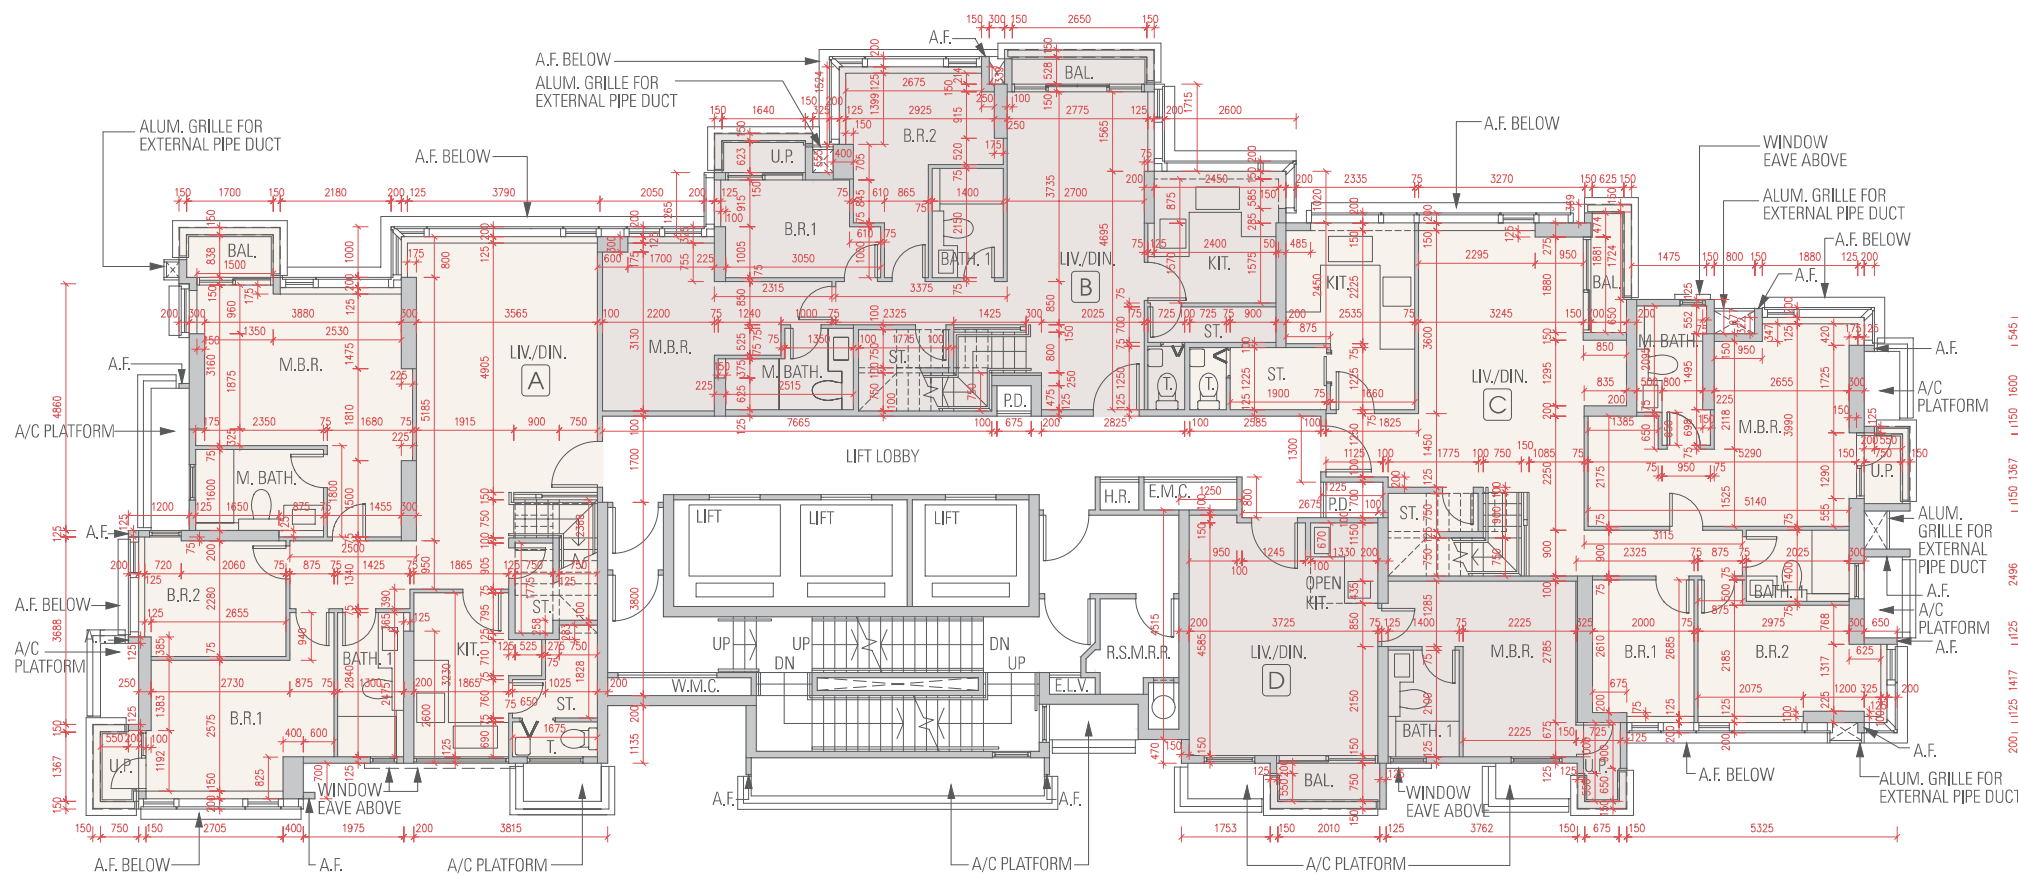

Scale 比例尺

Metres(米)

0

11 FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT 發展項目的住宅物業的樓面平面圖

30 /F Floor Plan 樓平面圖

	FLOOR 樓層	FLAT 單位			
		A	B	C	D
Floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (mm) 每個住宅物業的層與層之間的高度(指該樓層之石屎地台面與上一層石屎地台面之高度距離)(毫米)	30/F 30樓	3450 °3875 ~3900	3450 *3750 #3800 ^3850 #4200	3450 #3800 3850 ~3900 #4200	3450 #3800 3850 #4200
Thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板(不包括灰泥)厚度(毫米)		150 175 200	150 200	150 200	150 175

- * Inclusive of the sunken depth of the sunken electrical and mechanical zone on the floor of this floor (300mm).
 # Inclusive of the sunken depth of the sunken electrical and mechanical zone on the floor of this floor (350mm).
 ^ Inclusive of the sunken depth of the sunken electrical and mechanical zone on the floor of this floor (400mm).
 ° Inclusive of the sunken depth of the sunken electrical and mechanical zone on the floor of this floor (425mm).
 ~ Inclusive of the sunken depth of the sunken electrical and mechanical zone on the floor of this floor (450mm).

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors.
 (Remark: This statement is not applicable to the Development.)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- Please refer to glossary in the beginning of this chapter for abbreviations shown in the floor plan.

- * 包括本層地台跌級機電層之跌級深度(300毫米)。
 # 包括本層地台跌級機電層之跌級深度(350毫米)。
 ^ 包括本層地台跌級機電層之跌級深度(400毫米)。
 ° 包括本層地台跌級機電層之跌級深度(425毫米)。
 ~ 包括本層地台跌級機電層之跌級深度(450毫米)。


因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。
 (註：此陳述不適用於發展項目。)

備註：

- 樓面平面圖所列之尺寸為以毫米標示之建築結構尺寸。
- 有關平面圖中顯示之英文簡稱之詮釋，請參閱本章節開首之詞彙表。

11 FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT 發展項目的住宅物業的樓面平面圖

ROOF Plan 天台平面圖

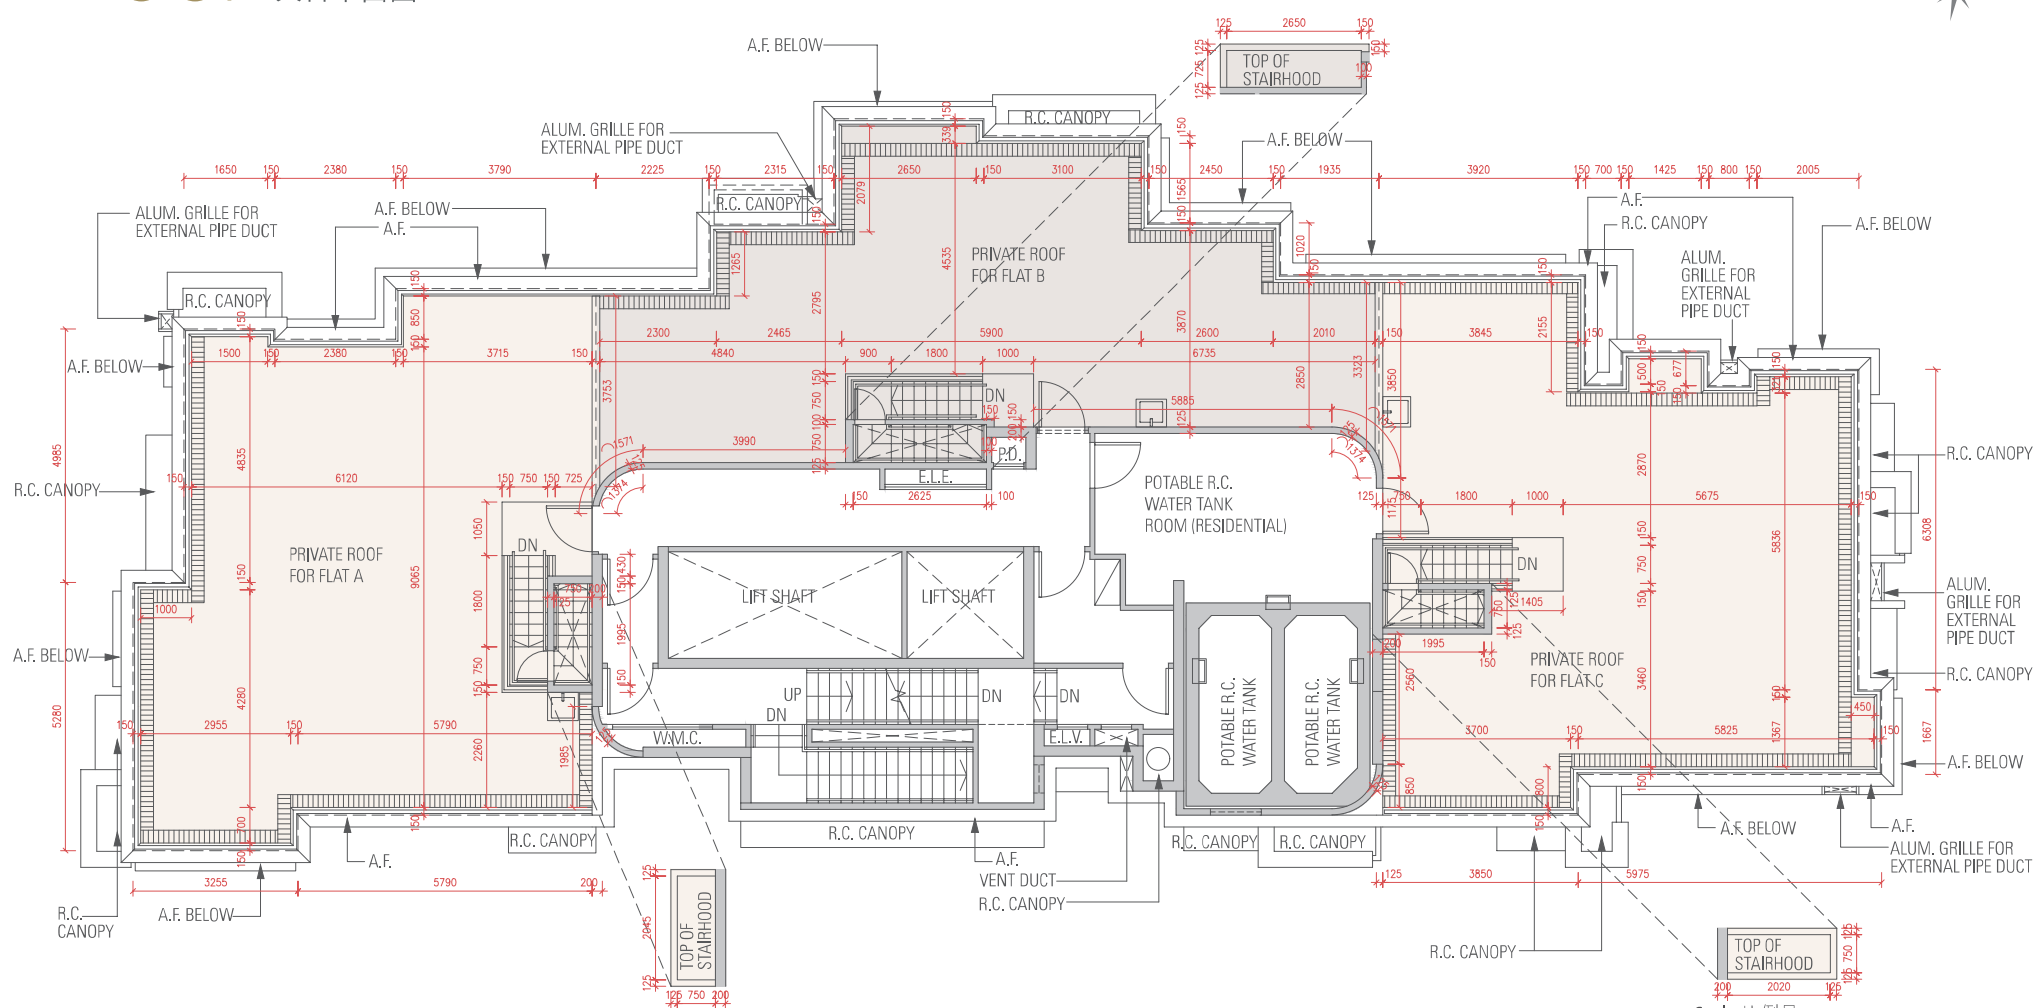

Scale 比例尺
Metres(米)
0 5

11 FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖

Roof Plan

天台平面圖

	FLOOR 樓層	FLAT 單位		
		A	B	C
Floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (mm) 每個住宅物業的層與層之間的高度(指該樓層之石屎地台面與上一層石屎地台面之高度距離)(毫米)	Roof 天台	**2550	**2550	**2550
Thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板(不包括灰泥)厚度(毫米)		150	150	150

** Applicable to stairhood only.

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors.
(Remark: This statement is not applicable to the Development.)

- Notes:
- The dimensions in the floor plans are all structural dimensions in millimetre.
 - Please refer to glossary in the beginning of this chapter for abbreviations shown in the floor plan.

** 僅適用於梯屋。

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。
(註：此陳述不適用於發展項目。)

- 備註：
- 樓面平面圖所列之尺寸為以毫米標示之建築結構尺寸。
 - 有關平面圖中顯示之英文簡稱之詮釋，請參閱本章節開首之詞彙表。