


FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖

2/F - 3/F, 5/F - 12/F, 15/F FLOOR PLAN

2 樓至 3 樓,
5 樓至 12 樓及
15 樓平面圖

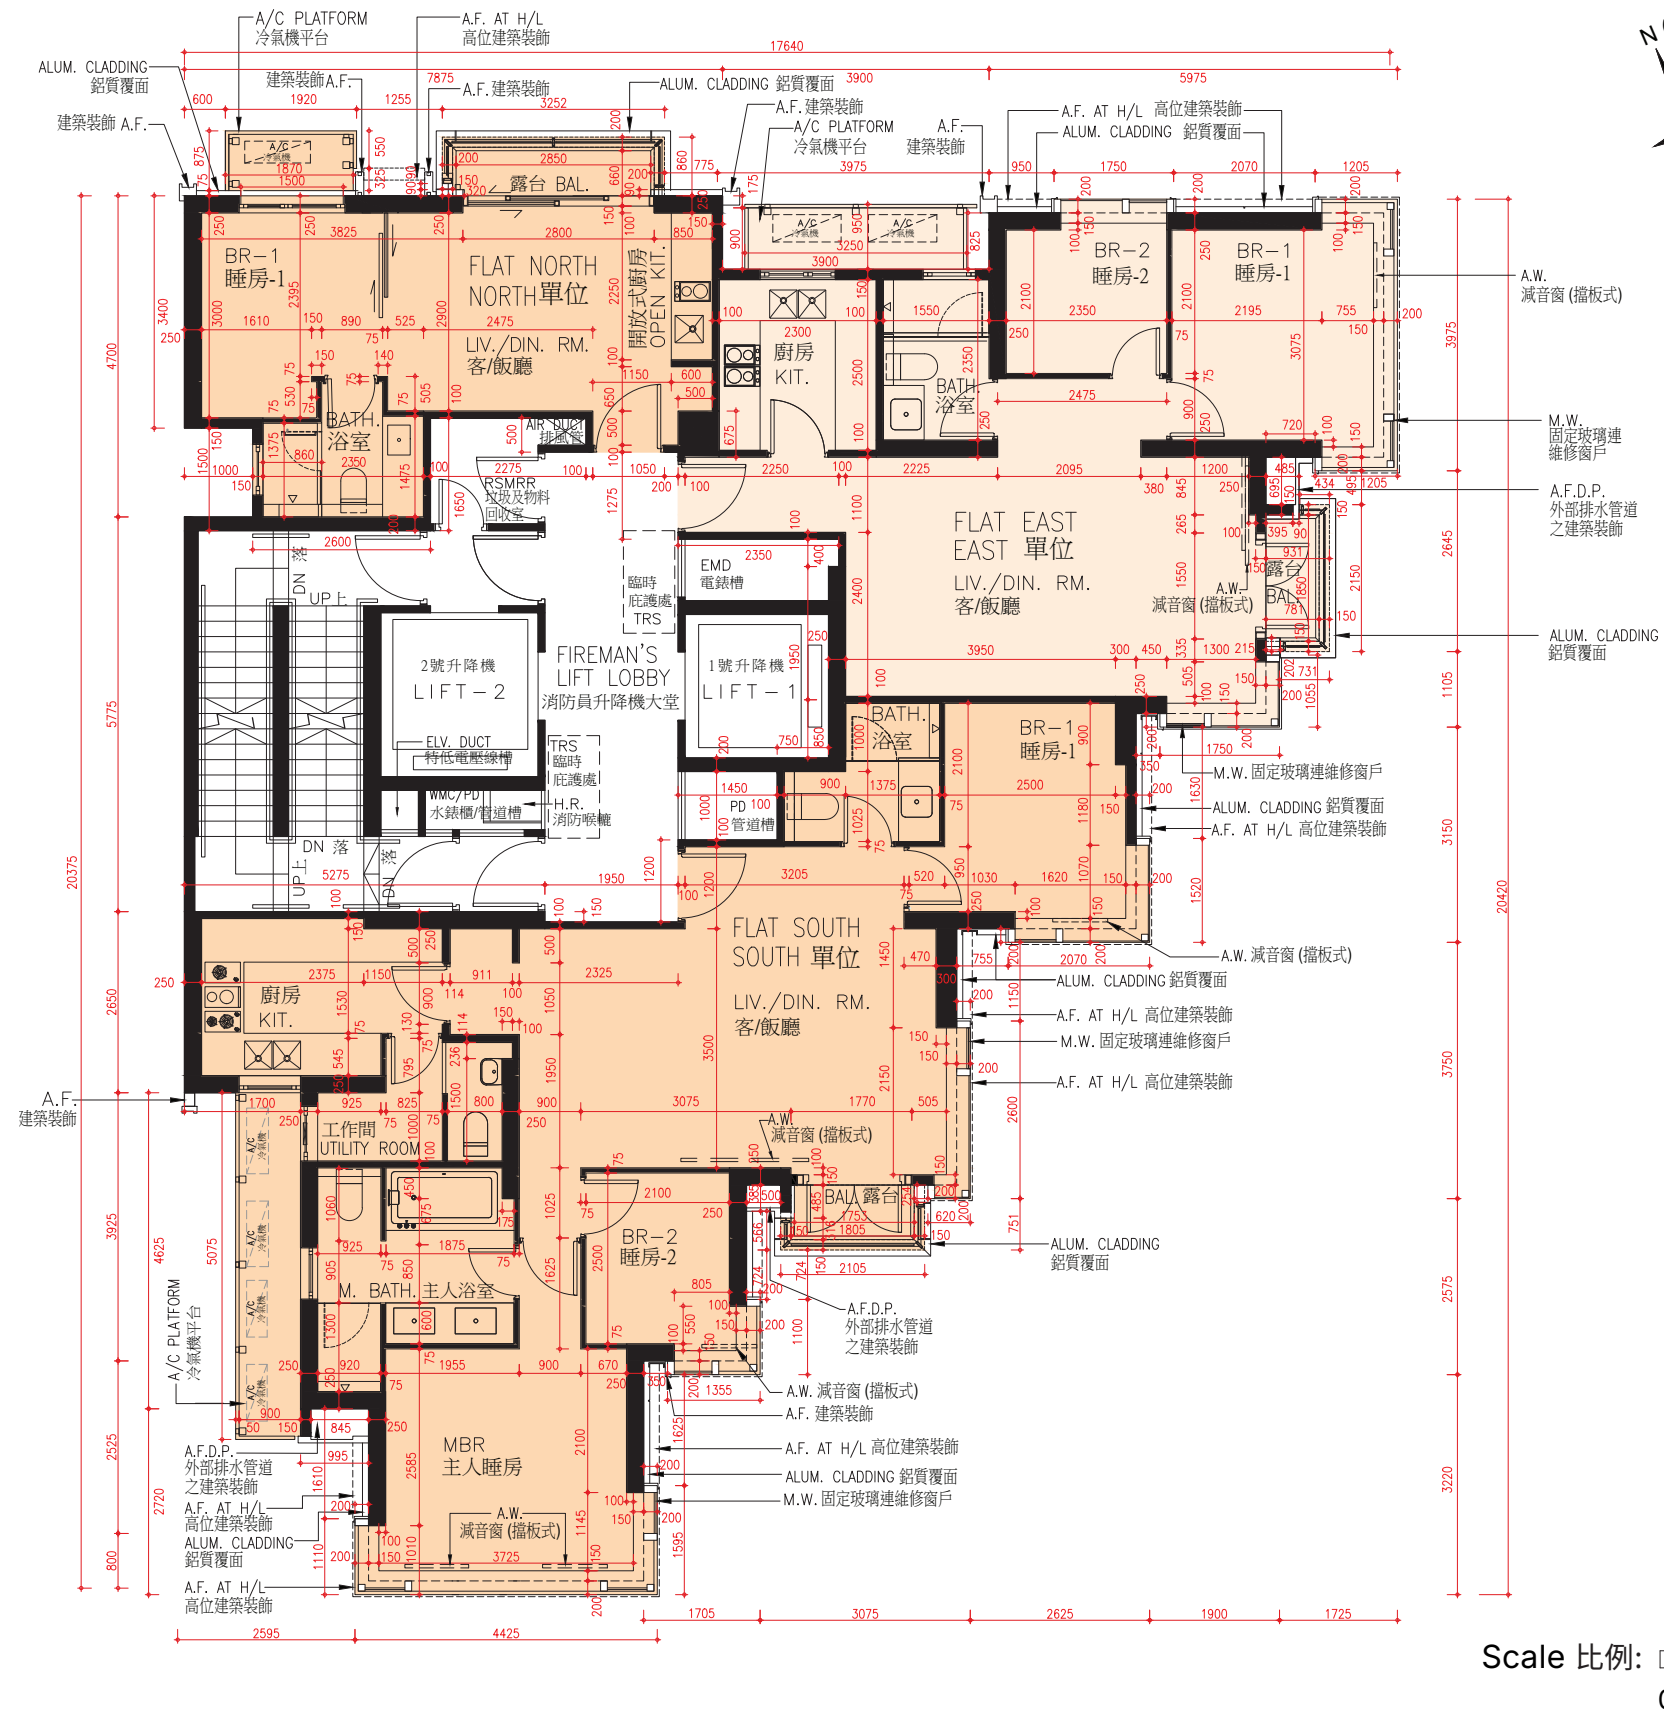

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖

FLOOR 樓層	FLAT 單位	THE THICKNESS OF THE FLOOR SLABS (EXCLUDING PLASTER) OF EACH RESIDENTIAL PROPERTY (MM) 每個住宅物業的樓板（不包括灰泥）的厚度（毫米）	THE FLOOR-TO-FLOOR HEIGHT OF EACH RESIDENTIAL PROPERTY (MM) 每個住宅物業的層與層之間的高度（毫米）
2/F-3/F, 5/F-12/F & 15/F 2 樓至 3 樓, 5 樓至 12 樓 及 15 樓	NORTH	150, 200	3150, 3150#, 3150@, 3150^
	EAST	150, 200	3150, 3150#, 3150@, 3150^, 3150*
	SOUTH	150, 200	3150, 3150#, 3150!, 3150◇, 3150^

INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 50(mm)
@ INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 200(mm)
◇ INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 250(mm)
! INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 300(mm)
^ INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 350(mm)
* INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 450(mm)

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. This situation and section 10(2)(e) of Part 1 of Schedule 1 to the Residential Properties (First-hand Sales) Ordinance is not applicable for this Development.

Notes:

1. The dimensions in the floor plans are all structural dimensions in millimetre.
2. Please refer to page 27 of this sales brochure for legend of the terms and abbreviations as shown on the floor plans of residential properties in the Development.
3. The floor-to-floor height refer to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.

包括本層地台跌級樓板之跌級深度50 (毫米)
@包括本層地台跌級樓板之跌級深度200 (毫米)
◇ 包括本層地台跌級樓板之跌級深度250 (毫米)
! 包括本層地台跌級樓板之跌級深度300 (毫米)
^ 包括本層地台跌級樓板之跌級深度350 (毫米)
* 包括本層地台跌級樓板之跌級深度450 (毫米)

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。此情況及《一手住宅物業銷售條例》附表1第1部第10(2)(e)條不適用於此發展項目。

備註：

1. 樓面平面圖所列之尺寸數字為以毫米標示之建築結構尺寸。
2. 請參閱本售樓說明書第27頁之圖例以協助閱讀此部分的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。
3. 每個住宅物業的層與層之間的高度指該層之石屎地台面與上一層石屎地台之高度距離。