

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT
發展項目的住宅物業的樓面平面圖

LEGEND OF TERMS AND ABBREVIATIONS USED ON FLOOR PLANS 樓面平面圖中所使用名詞及簡稱之圖例

A/C	= AIR-CONDITIONING 冷氣機
A/C PLATFORM	= AIR-CONDITIONING PLATFORM 冷氣機平台
A.F.	= ARCHITECTURAL FEATURE 建築裝飾
A.F. ABOVE	= ARCHITECTURAL FEATURE ABOVE 上方建築裝飾
A.F. AT H/L	= ARCHITECTURAL FEATURE AT HIGH-LEVEL 高位建築裝飾
A.F. AT L/L	= ARCHITECTURAL FEATURE AT LOW-LEVEL 低位建築裝飾
A.F. BELOW	= ARCHITECTURAL FEATURE BELOW 下方建築裝飾
A.F.D.P	= ARCHITECTURAL FEATURE FOR EXTERNAL DRAINAGE PIPES 外部排水管道之建築裝飾
AIR DUCT	= AIR DUCT 排風管
ALUM. CLADDING	= ALUMINIUM CLADDING 鋁質覆面
ALUM. CAPPING FOR CURTAIN WALL	= ALUMINIUM CAPPING FOR CURTAIN WALL 玻璃幕牆之鋁質封蓋
A.W.	= ACOUSTIC WINDOW (BAFFLE TYPE) 減音窗 (擋板式)
BAL.	= BALCONY 露台
BATH.	= BATHROOM 浴室
BATH-1	= BATHROOM 1 浴室-1
BATH-2	= BATHROOM 2 浴室-2
BLDG. LINE ABOVE	= BUILDING LINE ABOVE 上方建築物界線
BR-1	= BEDROOM 1 睡房-1
BR-2	= BEDROOM 2 睡房-2
BR-3	= BEDROOM 3 睡房-3
CHIMNEY FOR GENSET COVER FOR A.F.D.P	= CHIMNEY FOR GENSET 發電機煙囪 = COVER FOR ARCHITECTURAL FEATURE FOR EXTERNAL DRAINAGE PIPES 外部排水管道之建築裝飾蓋
DN	= DOWN 落
ELV. DUCT	= EXTRA-LOW VOLTAGE ELECTRICAL DUCT 特低壓電線槽
EMD	= ELECTRICAL METER DUCT 電錶槽
EMERGENCY GENERATOR ROOM	= EMERGENCY GENERATOR ROOM 應急發電機房

Notes:

- There are architectural features and/ or exposed common pipes on the external walls of some of the residential properties.
- Common pipes exposed and/or enclosed in cladding are located at / adjacent to the balcony and/or flat roof and/or air-conditioning platform and/or external walls of some of the residential properties.
- There are sunken slab and/ or false ceiling and/ or wall furring for mechanical & electrical services and/or air conditioning fittings at some of the residential properties.
- The internal ceiling height within some of the residential properties may vary due to structural, architectural and/or decoration design variations.
- Balconies are non-enclosed areas.
- Symbols of fittings and fitments shown on the floor plans, such as sink, water closets, shower cubicles, sink counter, etc., are architectural symbols extracted from the latest approved buildings plans and are for general indication only.
- There are curtain walls in the residential properties. The saleable area as defined in the formal agreement for sale and purchase of a residential property has included its curtain walls, and is measured from the exterior of such curtain walls.

FIREMAN'S LIFT LOBBY	= FIREMAN'S LIFT LOBBY 消防員升降機大堂
FLAT EAST	= EAST 單位
FLAT SOUTH	= SOUTH 單位
FLAT NORTH	= NORTH 單位
FLAT ROOF	= FLAT ROOF 平台
H.R.	= HOSE REEL 消防喉轆
KIT.	= KITCHEN 廚房
KIT. STORE	= KITCHEN STORAGE 廚房儲物室
LIFT-1	= LIFT-1 1 號升降機
LIFT-2	= LIFT-2 2 號升降機
LIFT-1 LIFT SHAFT	= LIFT-1 LIFT SHAFT 1 號升降機機槽
LIFT-2 LIFT SHAFT	= LIFT-2 LIFT SHAFT 2 號升降機機槽
LIV./ DIN. RM.	= LIVING ROOM AND DINING ROOM 客/飯廳
M. BATH	= MASTER BATHROOM 主人浴室
MBR	= MASTER BEDROOM 主人睡房
M.W.	= FIXED GLAZING WITH MAINTENANCE WINDOW 固定玻璃連維修窗戶
OPEN KIT.	= OPEN KITCHEN 開放式廚房
PD	= PIPE DUCT 管道槽
POTABLE WATER PUMP ROOM	= POTABLE WATER PUMP ROOM 食水泵房
POWDER RM	= POWDER ROOM 化妝間
R.C. COVER	= REINFORCED CONCRETE COVER 石屎露台頂
R.C. COVER WITH ALUM. CLADDING FOR BAL.	= REINFORCED CONCRETE COVER WITH ALUMINIUM CLADDING FOR BALCONY 石屎露台頂鋁質覆面
RSMRR	= REFUSE STORAGE & MATERIAL RECOVERY ROOM 垃圾及物料回收室
SMOKE LOBBY	= SMOKE LOBBY 防煙大堂
STORE	= STORE 儲物室
TRS	= TEMPORARY REFUGE SPACE 臨時庇護處
UP	= UP 上
UTILITY ROOM	= UTILITY ROOM 工作間
WMC/PD	= WATER METER CABINET/ PIPE DUCT 水錶櫃/管道槽

備註：


- 部分住宅物業外牆範圍設有建築裝飾及/或外露公用喉管。
- 部分住宅物業的露台及/或平台及/或冷氣機平台及/或外牆上/附近設有外露及/或外牆裝飾板內藏之公用喉管。
- 部分住宅物業的天花板有跌級樓板及/或假天花及/或裝飾牆身內裝置機電設備及/或空調設備。
- 部分住宅物業之室內天花高度將會因應結構、建築及/或裝修設計上的需要而有差異。
- 露台為非封閉的地方。
- 樓面平面圖上所顯示的裝置符號，如洗滌盆、座廁、淋浴間、洗滌盆櫃等乃按最新的經批准建築圖則繪製，只作一般性標示。
- 住宅物業有幕牆。住宅物業之正式買賣合約內所定義之實用面積已包括其幕牆，並由幕牆之外圍起計。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT


發展項目的住宅物業的樓面平面圖

1/F FLOOR PLAN

1 樓平面圖

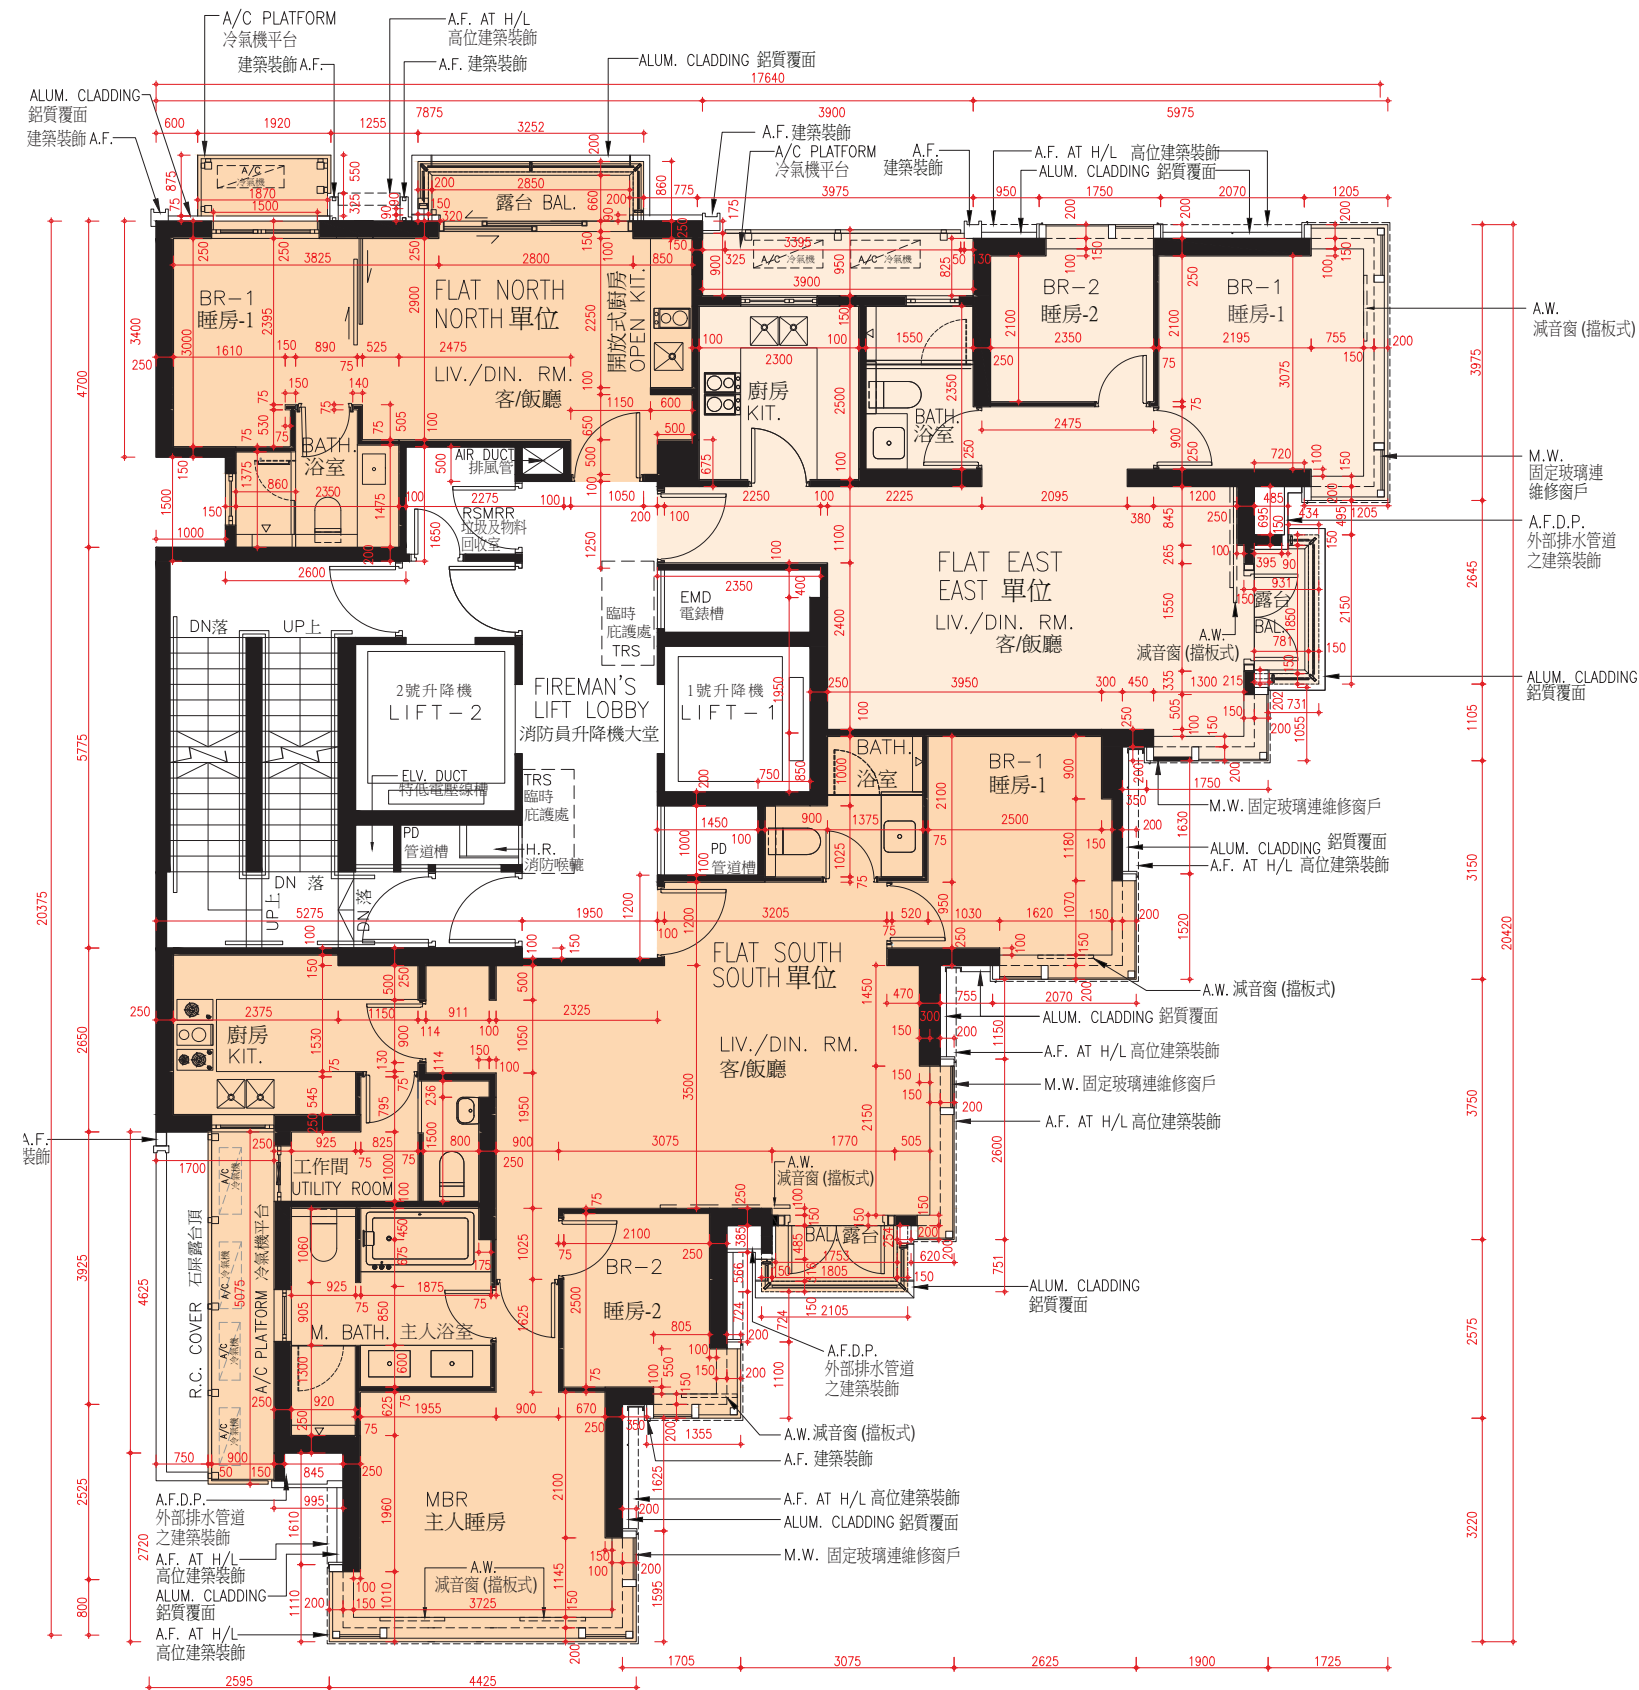

Scale 比例:



0

5m (米)

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖

FLOOR 樓層	FLAT 單位	THE THICKNESS OF THE FLOOR SLABS (EXCLUDING PLASTER) OF EACH RESIDENTIAL PROPERTY (MM) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	THE FLOOR-TO-FLOOR HEIGHT OF EACH RESIDENTIAL PROPERTY (MM) 每個住宅物業的層與層之間的高度 (毫米)
1/F 1樓	NORTH	150, 200	3100!, 3150, 3150#, 3250!
	EAST	150, 200	3000!, 3100, 3100!, 3150, 3150#, 3200#, 3250!, 3450!
	SOUTH	150, 200	3150, 3150#, 3150!, 3150◇, 3150^, 3200^

INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 50(mm)
◇ INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 250(mm)
! INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 300(mm)
^ INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 350(mm)

包括本層地台跌級樓板之跌級深度50 (毫米)
◇ 包括本層地台跌級樓板之跌級深度250 (毫米)
! 包括本層地台跌級樓板之跌級深度300 (毫米)
^ 包括本層地台跌級樓板之跌級深度350 (毫米)

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. This situation and section 10(2)(e) of Part 1 of Schedule 1 to the Residential Properties (First-hand Sales) Ordinance is not applicable for this Development.

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。此情況及《一手住宅物業銷售條例》附表1第1部第10(2)(e)條不適用於此發展項目。

Notes:

1. The dimensions in the floor plans are all structural dimensions in millimetre.
2. Please refer to page 27 of this sales brochure for legend of the terms and abbreviations as shown on the floor plans of residential properties in the Development.
3. The floor-to-floor height refer to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.

備註：


1. 樓面平面圖所列之尺寸數字為以毫米標示之建築結構尺寸。
2. 請參閱本售樓說明書第27頁之圖例以協助閱讀此部分的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。
3. 每個住宅物業的層與層之間的高度指該層之石屎地台面與上一層石屎地台之高度距離。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖

2/F - 3/F, 5/F - 12/F, 15/F FLOOR PLAN

2 樓至 3 樓,
5 樓至 12 樓及
15 樓平面圖

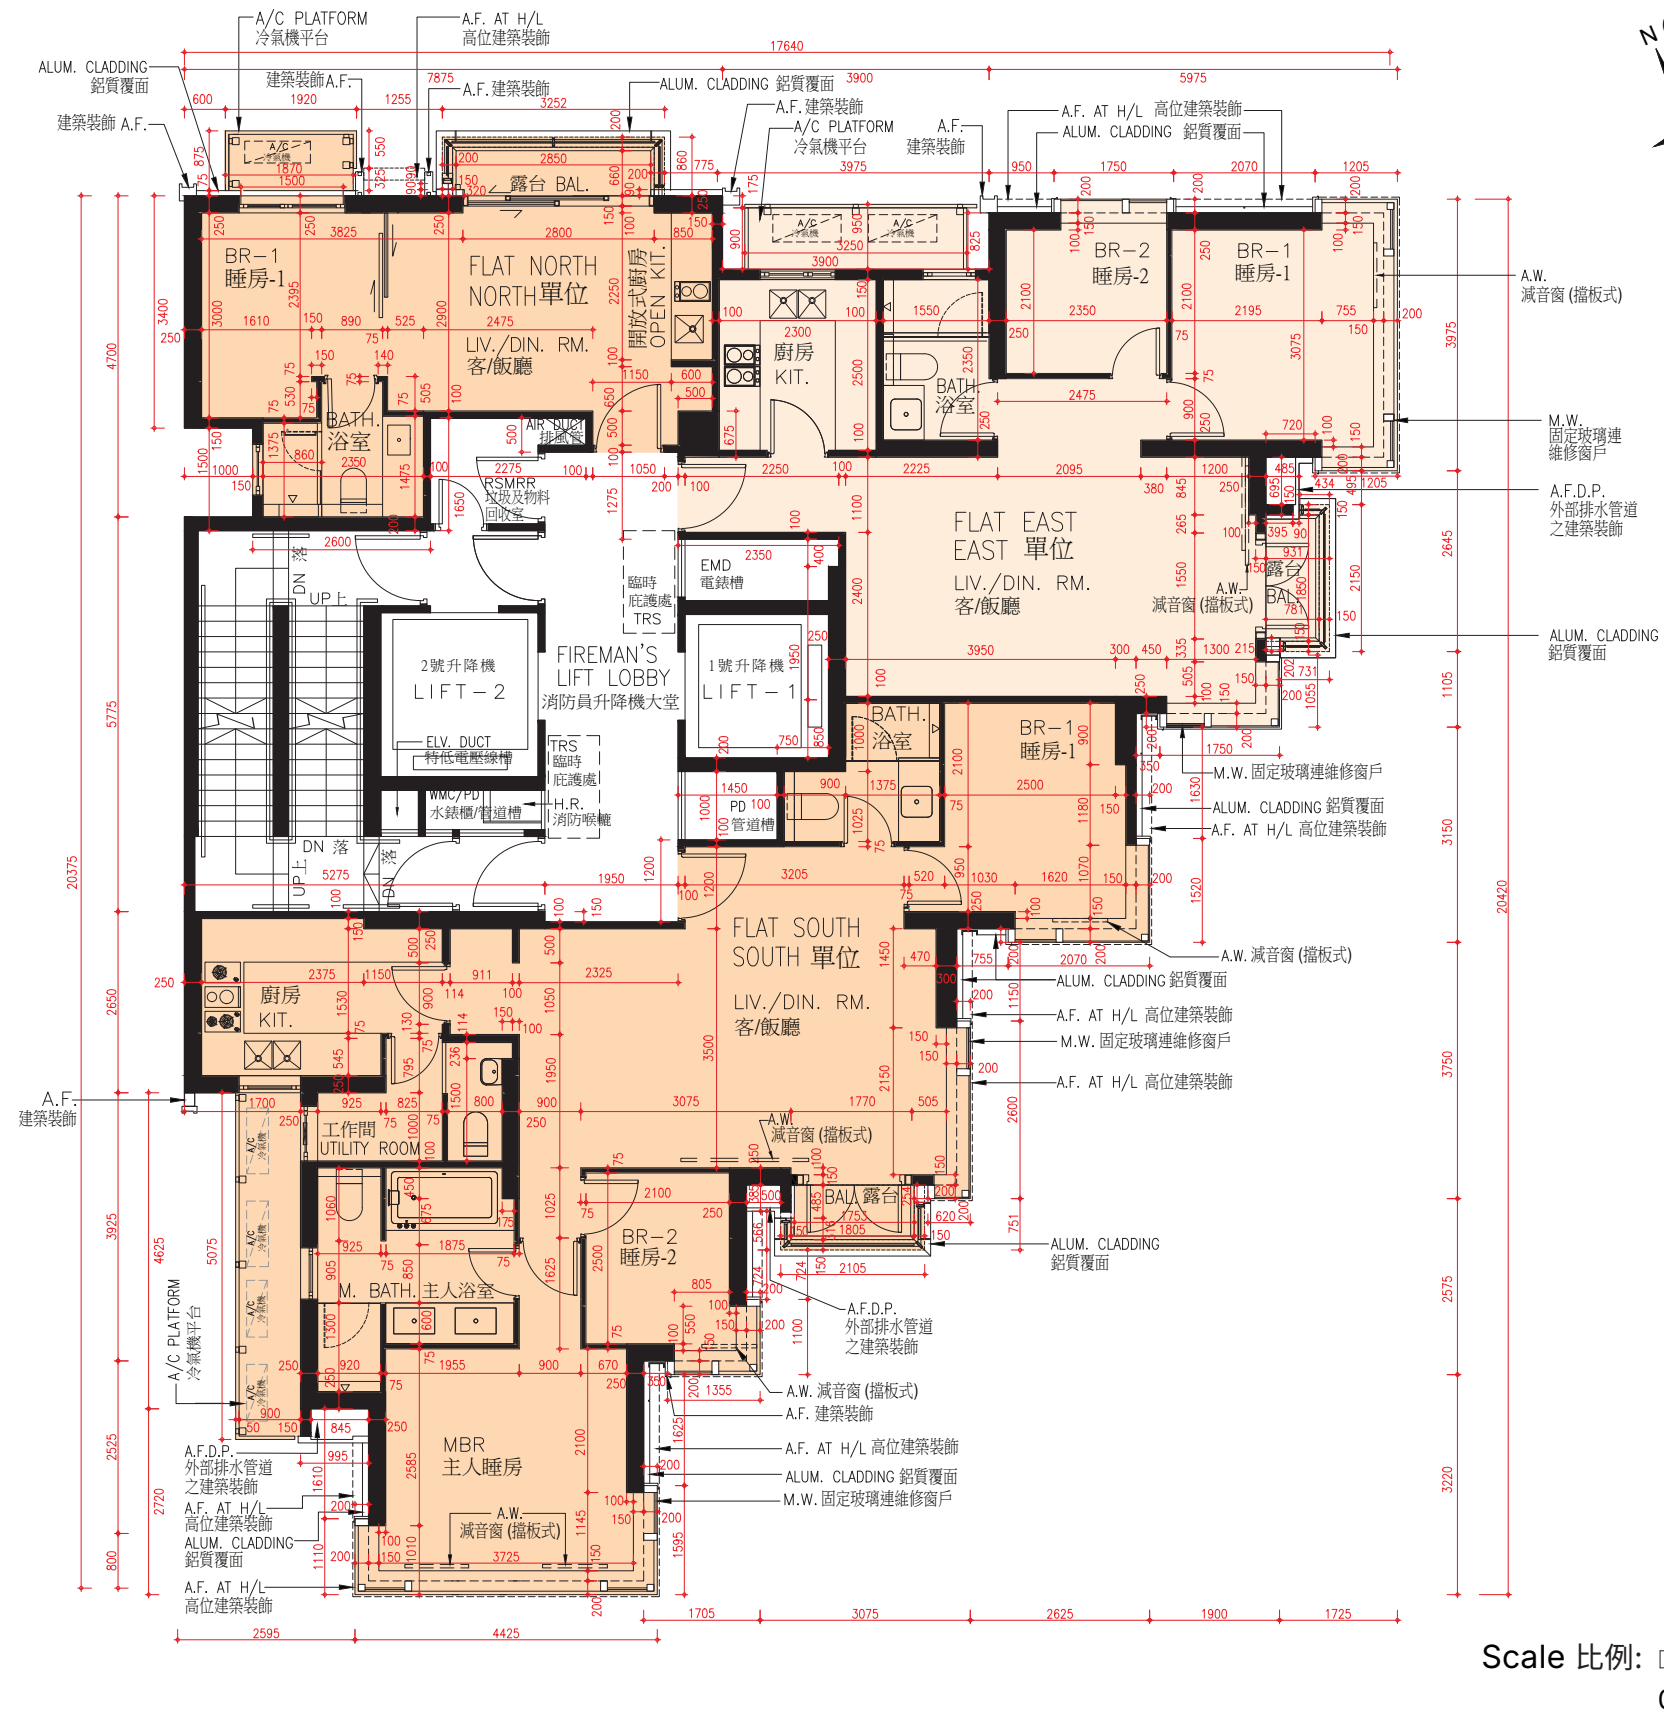

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖

FLOOR 樓層	FLAT 單位	THE THICKNESS OF THE FLOOR SLABS (EXCLUDING PLASTER) OF EACH RESIDENTIAL PROPERTY (MM) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	THE FLOOR-TO-FLOOR HEIGHT OF EACH RESIDENTIAL PROPERTY (MM) 每個住宅物業的層與層之間的高度 (毫米)
2/F-3/F, 5/F-12/F & 15/F 2 樓至 3 樓, 5 樓至 12 樓 及 15 樓	NORTH	150, 200	3150, 3150#, 3150@, 3150^
	EAST	150, 200	3150, 3150#, 3150@, 3150^, 3150*
	SOUTH	150, 200	3150, 3150#, 3150!, 3150◇, 3150^

INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 50(mm)
@ INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 200(mm)
◇ INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 250(mm)
! INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 300(mm)
^ INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 350(mm)
* INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 450(mm)

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. This situation and section 10(2)(e) of Part 1 of Schedule 1 to the Residential Properties (First-hand Sales) Ordinance is not applicable for this Development.

Notes:

1. The dimensions in the floor plans are all structural dimensions in millimetre.
2. Please refer to page 27 of this sales brochure for legend of the terms and abbreviations as shown on the floor plans of residential properties in the Development.
3. The floor-to-floor height refer to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.

包括本層地台跌級樓板之跌級深度50 (毫米)
@包括本層地台跌級樓板之跌級深度200 (毫米)
◇ 包括本層地台跌級樓板之跌級深度250 (毫米)
! 包括本層地台跌級樓板之跌級深度300 (毫米)
^ 包括本層地台跌級樓板之跌級深度350 (毫米)
* 包括本層地台跌級樓板之跌級深度450 (毫米)

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。此情況及《一手住宅物業銷售條例》附表1第1部第10(2)(e)條不適用於此發展項目。

備註：


1. 樓面平面圖所列之尺寸數字為以毫米標示之建築結構尺寸。
2. 請參閱本售樓說明書第27頁之圖例以協助閱讀此部分的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。
3. 每個住宅物業的層與層之間的高度指該層之石屎地台面與上一層石屎地台之高度距離。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖

16/F FLOOR PLAN

16 樓平面圖

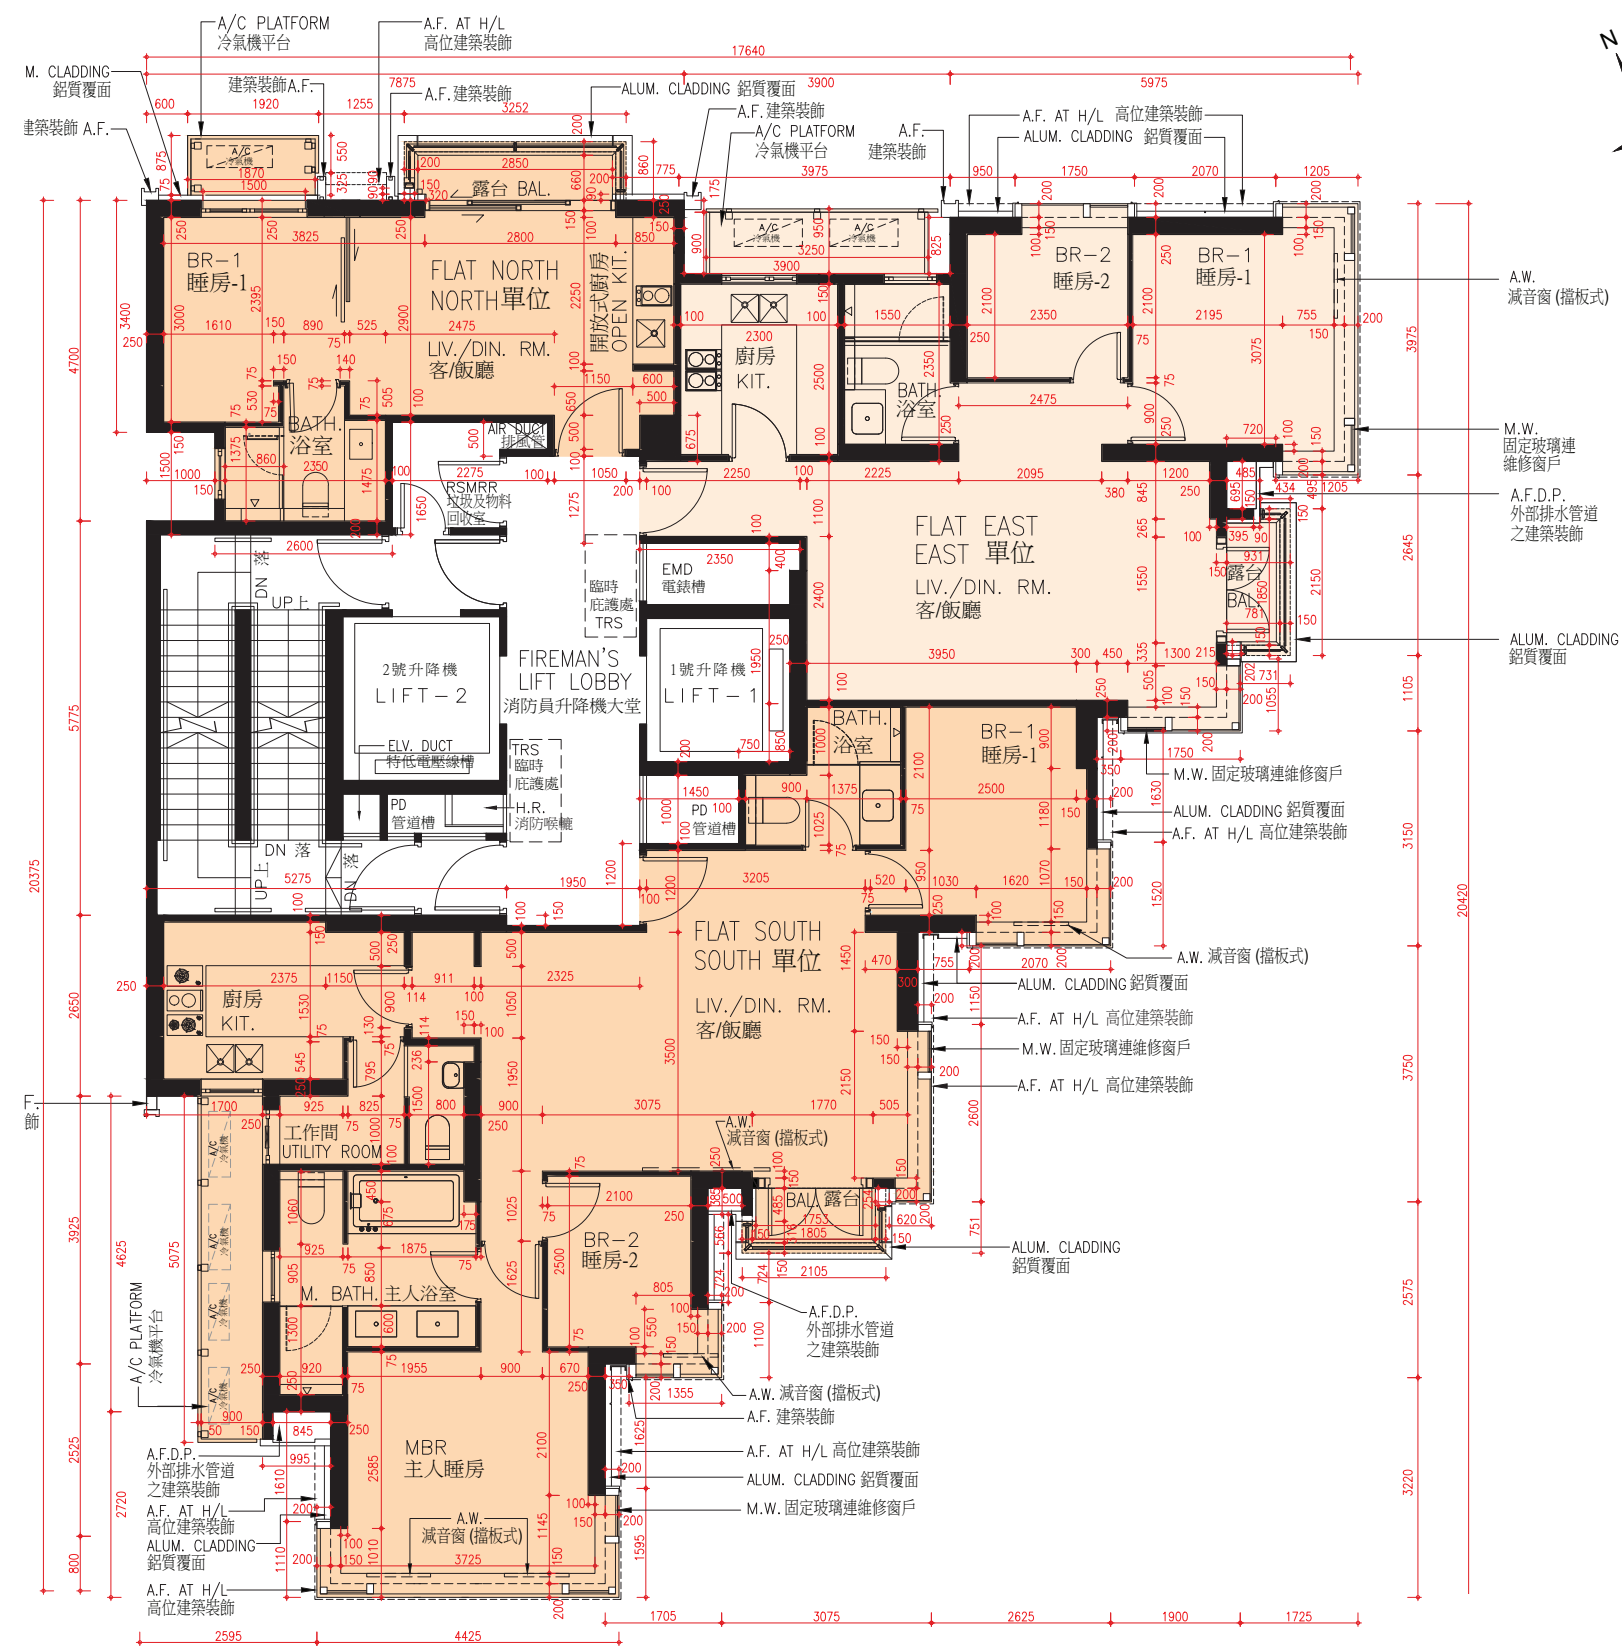

Scale 比例: 0 5m (米)

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖

FLOOR 樓層	FLAT 單位	THE THICKNESS OF THE FLOOR SLABS (EXCLUDING PLASTER) OF EACH RESIDENTIAL PROPERTY (MM) 每個住宅物業的樓板（不包括灰泥）的厚度（毫米）	THE FLOOR-TO-FLOOR HEIGHT OF EACH RESIDENTIAL PROPERTY (MM) 每個住宅物業的層與層之間的高度（毫米）
16/F 16 樓	NORTH	150, 200	3150, 3150#, 3150@, 3150^
	EAST	150, 200	3150, 3150#, 3150@, 3150^, 3150*
	SOUTH	150, 200	3150, 3150#, 3150!, 3150◇, 3150^

INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 50(mm)
@ INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 200(mm)
◇ INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 250(mm)
! INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 300(mm)
^ INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 350(mm)
* INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 450(mm)

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. This situation and section 10(2)(e) of Part 1 of Schedule 1 to the Residential Properties (First-hand Sales) Ordinance is not applicable for this Development.

Notes:

1. The dimensions in the floor plans are all structural dimensions in millimetre.
2. Please refer to page 27 of this sales brochure for legend of the terms and abbreviations as shown on the floor plans of residential properties in the Development.
3. The floor-to-floor height refer to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.

包括本層地台跌級樓板之跌級深度50 (毫米)
@包括本層地台跌級樓板之跌級深度200 (毫米)
◇ 包括本層地台跌級樓板之跌級深度250 (毫米)
! 包括本層地台跌級樓板之跌級深度300 (毫米)
^ 包括本層地台跌級樓板之跌級深度350 (毫米)
* 包括本層地台跌級樓板之跌級深度450 (毫米)

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。此情況及《一手住宅物業銷售條例》附表1第1部第10(2)(e)條不適用於此發展項目。

備註：


1. 樓面平面圖所列之尺寸數字為以毫米標示之建築結構尺寸。
2. 請參閱本售樓說明書第27頁之圖例以協助閱讀此部分的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。
3. 每個住宅物業的層與層之間的高度指該層之石屎地台面與上一層石屎地台之高度距離。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖

17/F FLOOR PLAN

17 樓平面圖

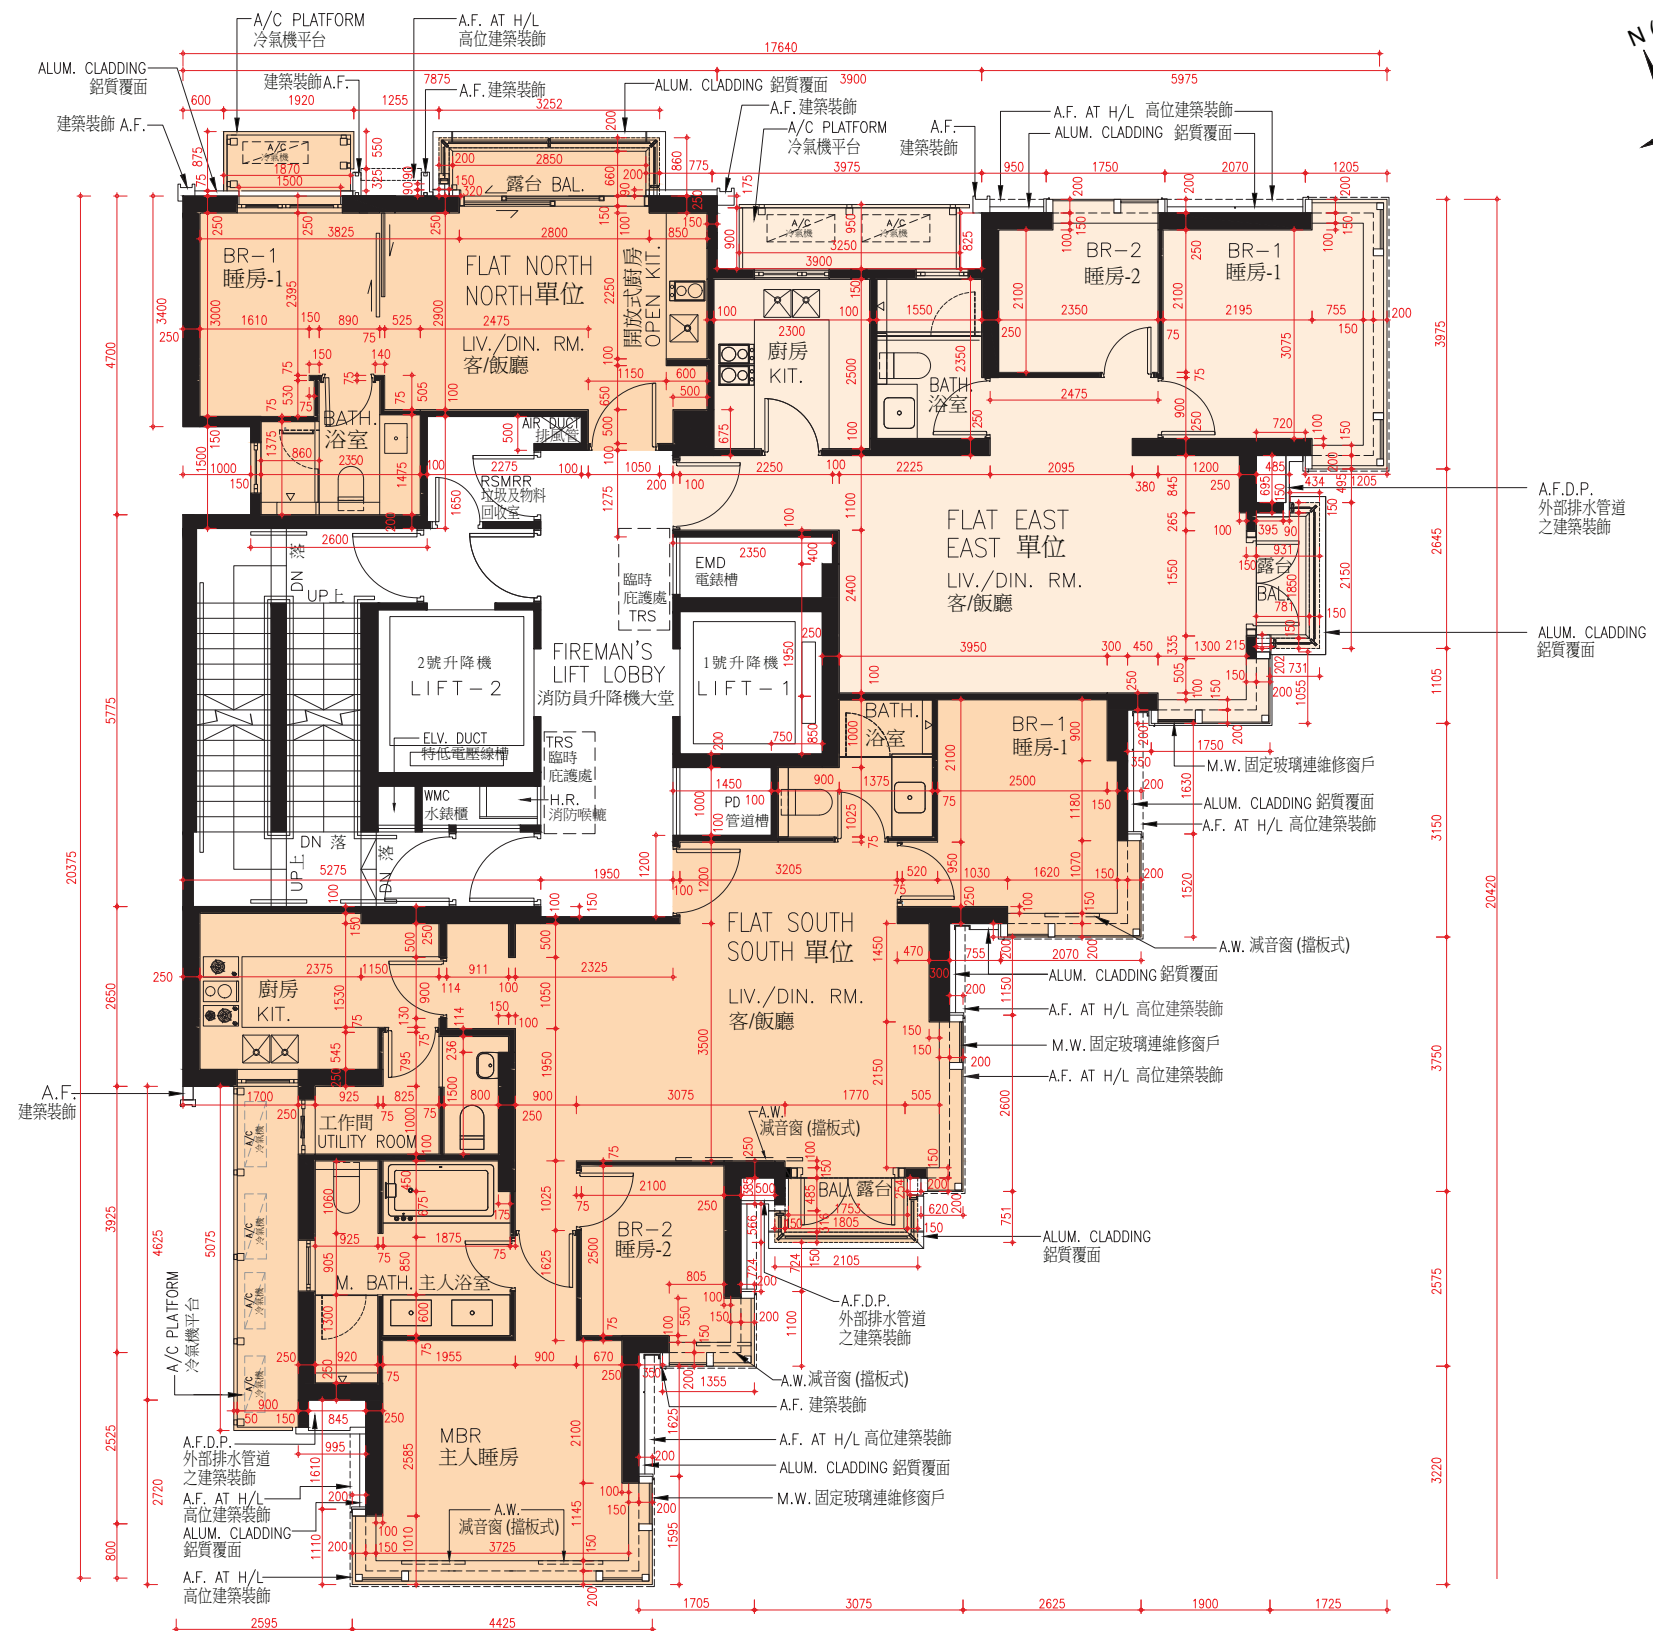

Scale 比例: 0 5m (米)

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖

FLOOR 樓層	FLAT 單位	THE THICKNESS OF THE FLOOR SLABS (EXCLUDING PLASTER) OF EACH RESIDENTIAL PROPERTY (MM) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	THE FLOOR-TO-FLOOR HEIGHT OF EACH RESIDENTIAL PROPERTY (MM) 每個住宅物業的層與層之間的高度 (毫米)
17/F 17 樓	NORTH	150, 200	3150, 3150#, 3150@, 3150^
	EAST	150, 200	3150, 3150#, 3150@, 3150^, 3150*
	SOUTH	150, 200	3150, 3150#, 3150!, 3150◇, 3150^

INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 50(mm)
@ INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 200(mm)
◇ INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 250(mm)
! INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 300(mm)
^ INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 350(mm)
* INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 450(mm)

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. This situation and section 10(2)(e) of Part 1 of Schedule 1 to the Residential Properties (First-hand Sales) Ordinance is not applicable for this Development.

Notes:

1. The dimensions in the floor plans are all structural dimensions in millimetre.
2. Please refer to page 27 of this sales brochure for legend of the terms and abbreviations as shown on the floor plans of residential properties in the Development.
3. The floor-to-floor height refer to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.

包括本層地台跌級樓板之跌級深度50 (毫米)
@包括本層地台跌級樓板之跌級深度200 (毫米)
◇ 包括本層地台跌級樓板之跌級深度250 (毫米)
! 包括本層地台跌級樓板之跌級深度300 (毫米)
^ 包括本層地台跌級樓板之跌級深度350 (毫米)
* 包括本層地台跌級樓板之跌級深度450 (毫米)

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。此情況及《一手住宅物業銷售條例》附表1第1部第10(2)(e)條不適用於此發展項目。

備註：


1. 樓面平面圖所列之尺寸數字為以毫米標示之建築結構尺寸。
2. 請參閱本售樓說明書第27頁之圖例以協助閱讀此部分的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。
3. 每個住宅物業的層與層之間的高度指該層之石屎地台面與上一層石屎地台之高度距離。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖

18/F FLOOR PLAN

18 樓平面圖

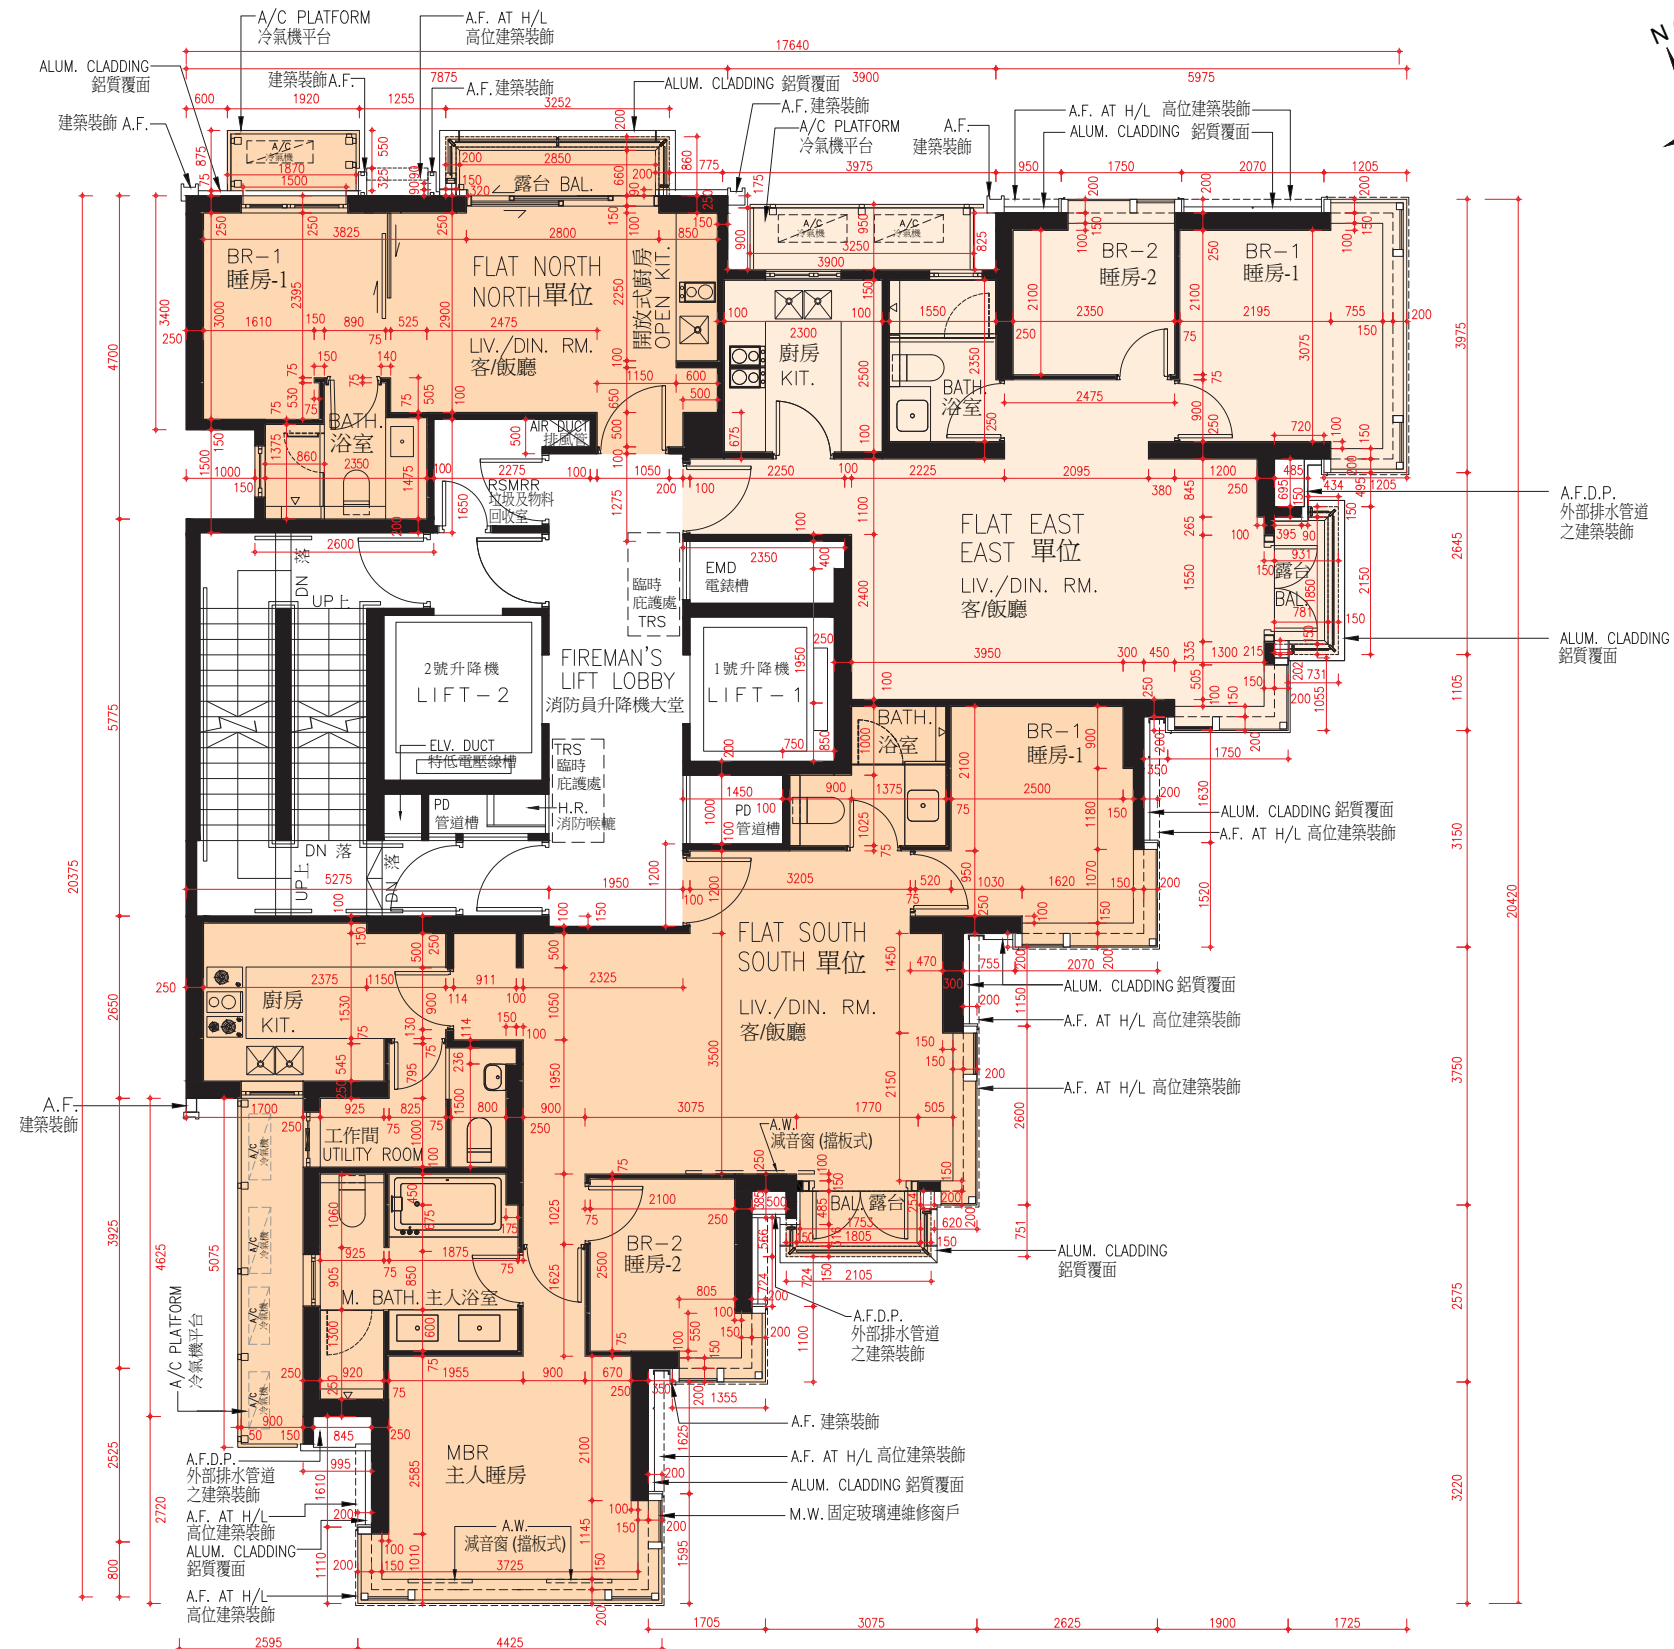

Scale 比例: 0 5m (米)

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖

FLOOR 樓層	FLAT 單位	THE THICKNESS OF THE FLOOR SLABS (EXCLUDING PLASTER) OF EACH RESIDENTIAL PROPERTY (MM) 每個住宅物業的樓板（不包括灰泥）的厚度（毫米）	THE FLOOR-TO-FLOOR HEIGHT OF EACH RESIDENTIAL PROPERTY (MM) 每個住宅物業的層與層之間的高度（毫米）
18/F 18樓	NORTH	150, 200	3150, 3150#, 3150@, 3150^
	EAST	150, 200	3150, 3150#, 3150@, 3150^, 3150*
	SOUTH	150, 200	3150, 3150#, 3150!, 3150◇, 3150^

INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 50(mm)
@ INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 200(mm)
◇ INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 250(mm)
! INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 300(mm)
^ INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 350(mm)
* INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 450(mm)

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. This situation and section 10(2)(e) of Part 1 of Schedule 1 to the Residential Properties (First-hand Sales) Ordinance is not applicable for this Development.

Notes:

1. The dimensions in the floor plans are all structural dimensions in millimetre.
2. Please refer to page 27 of this sales brochure for legend of the terms and abbreviations as shown on the floor plans of residential properties in the Development.
3. The floor-to-floor height refer to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.

包括本層地台跌級樓板之跌級深度50 (毫米)
@包括本層地台跌級樓板之跌級深度200 (毫米)
◇ 包括本層地台跌級樓板之跌級深度250 (毫米)
! 包括本層地台跌級樓板之跌級深度300 (毫米)
^ 包括本層地台跌級樓板之跌級深度350 (毫米)
* 包括本層地台跌級樓板之跌級深度450 (毫米)

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。此情況及《一手住宅物業銷售條例》附表1第1部第10(2)(e)條不適用於此發展項目。

備註：


1. 樓面平面圖所列之尺寸數字為以毫米標示之建築結構尺寸。
2. 請參閱本售樓說明書第27頁之圖例以協助閱讀此部分的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。
3. 每個住宅物業的層與層之間的高度指該層之石屎地台面與上一層石屎地台之高度距離。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖

19/F - 21/F FLOOR PLAN

19 樓至 21 樓平面圖

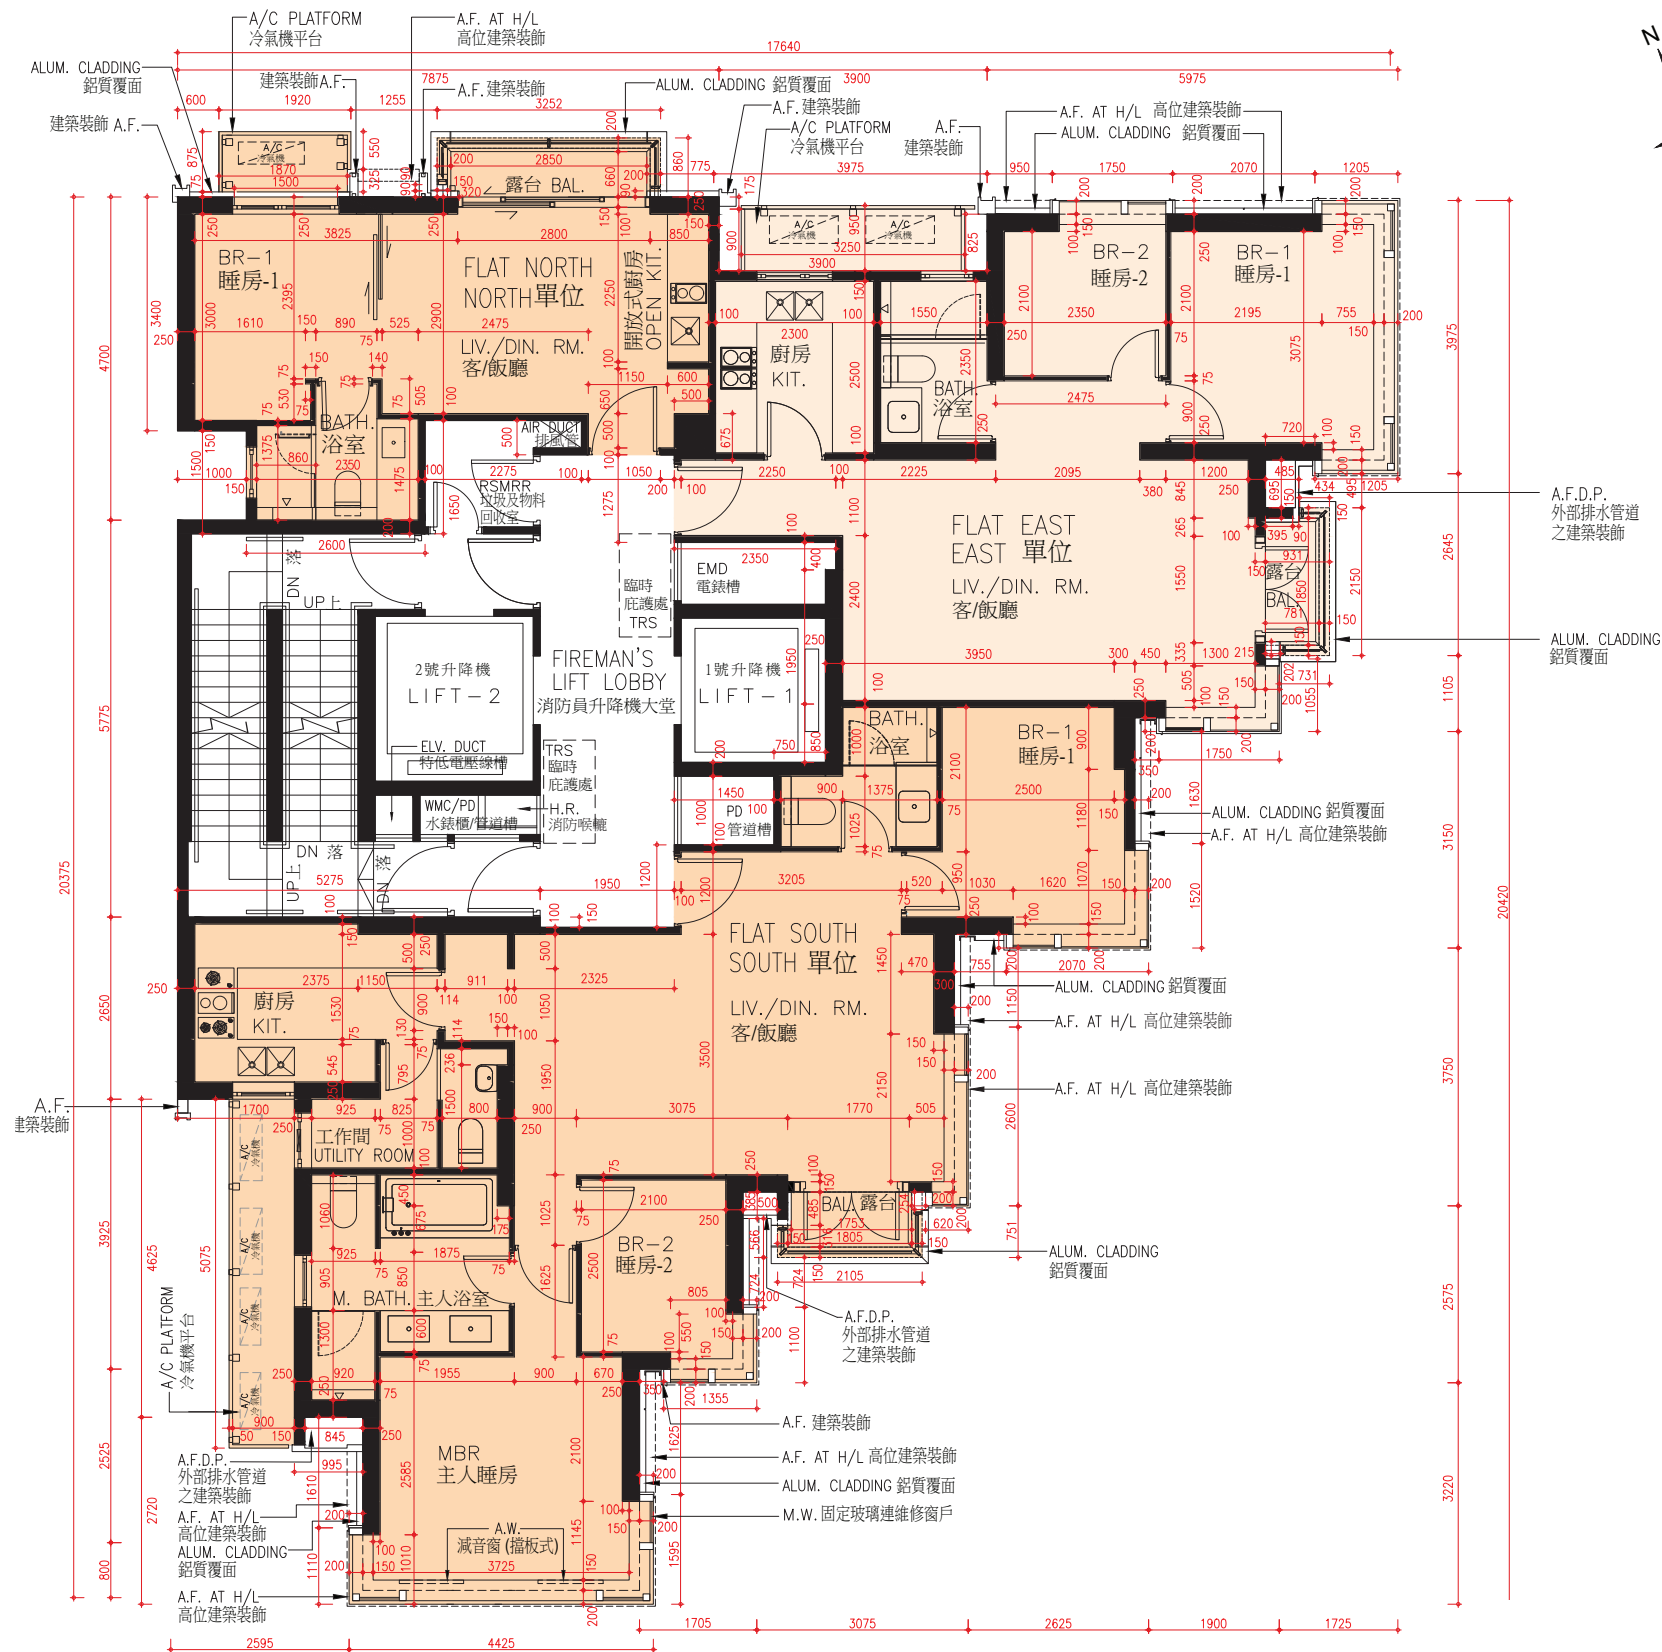

Scale 比例: 0 5m (米)

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖

FLOOR 樓層	FLAT 單位	THE THICKNESS OF THE FLOOR SLABS (EXCLUDING PLASTER) OF EACH RESIDENTIAL PROPERTY (MM) 每個住宅物業的樓板（不包括灰泥）的厚度（毫米）	THE FLOOR-TO-FLOOR HEIGHT OF EACH RESIDENTIAL PROPERTY (MM) 每個住宅物業的層與層之間的高度（毫米）
19/F - 21/F 19 樓至 21 樓	NORTH	150, 200	3150, 3150#, 3150@, 3150^
	EAST	150, 200	3150, 3150#, 3150@, 3150^, 3150*
	SOUTH	150, 200	3150, 3150#, 3150!, 3150◇, 3150^

INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 50(mm)
@ INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 200(mm)
◇ INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 250(mm)
! INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 300(mm)
^ INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 350(mm)
* INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 450(mm)

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. This situation and section 10(2)(e) of Part 1 of Schedule 1 to the Residential Properties (First-hand Sales) Ordinance is not applicable for this Development.

Notes:

1. The dimensions in the floor plans are all structural dimensions in millimetre.
2. Please refer to page 27 of this sales brochure for legend of the terms and abbreviations as shown on the floor plans of residential properties in the Development.
3. The floor-to-floor height refer to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.

包括本層地台跌級樓板之跌級深度50 (毫米)
@包括本層地台跌級樓板之跌級深度200 (毫米)
◇ 包括本層地台跌級樓板之跌級深度250 (毫米)
! 包括本層地台跌級樓板之跌級深度300 (毫米)
^ 包括本層地台跌級樓板之跌級深度350 (毫米)
* 包括本層地台跌級樓板之跌級深度450 (毫米)

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。此情況及《一手住宅物業銷售條例》附表1第1部第10(2)(e)條不適用於此發展項目。

備註：


1. 樓面平面圖所列之尺寸數字為以毫米標示之建築結構尺寸。
2. 請參閱本售樓說明書第27頁之圖例以協助閱讀此部分的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。
3. 每個住宅物業的層與層之間的高度指該層之石屎地台面與上一層石屎地台之高度距離。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖

22/F - 23/F & 25/F FLOOR PLAN

22 樓至 23 樓
及 25 樓平面圖

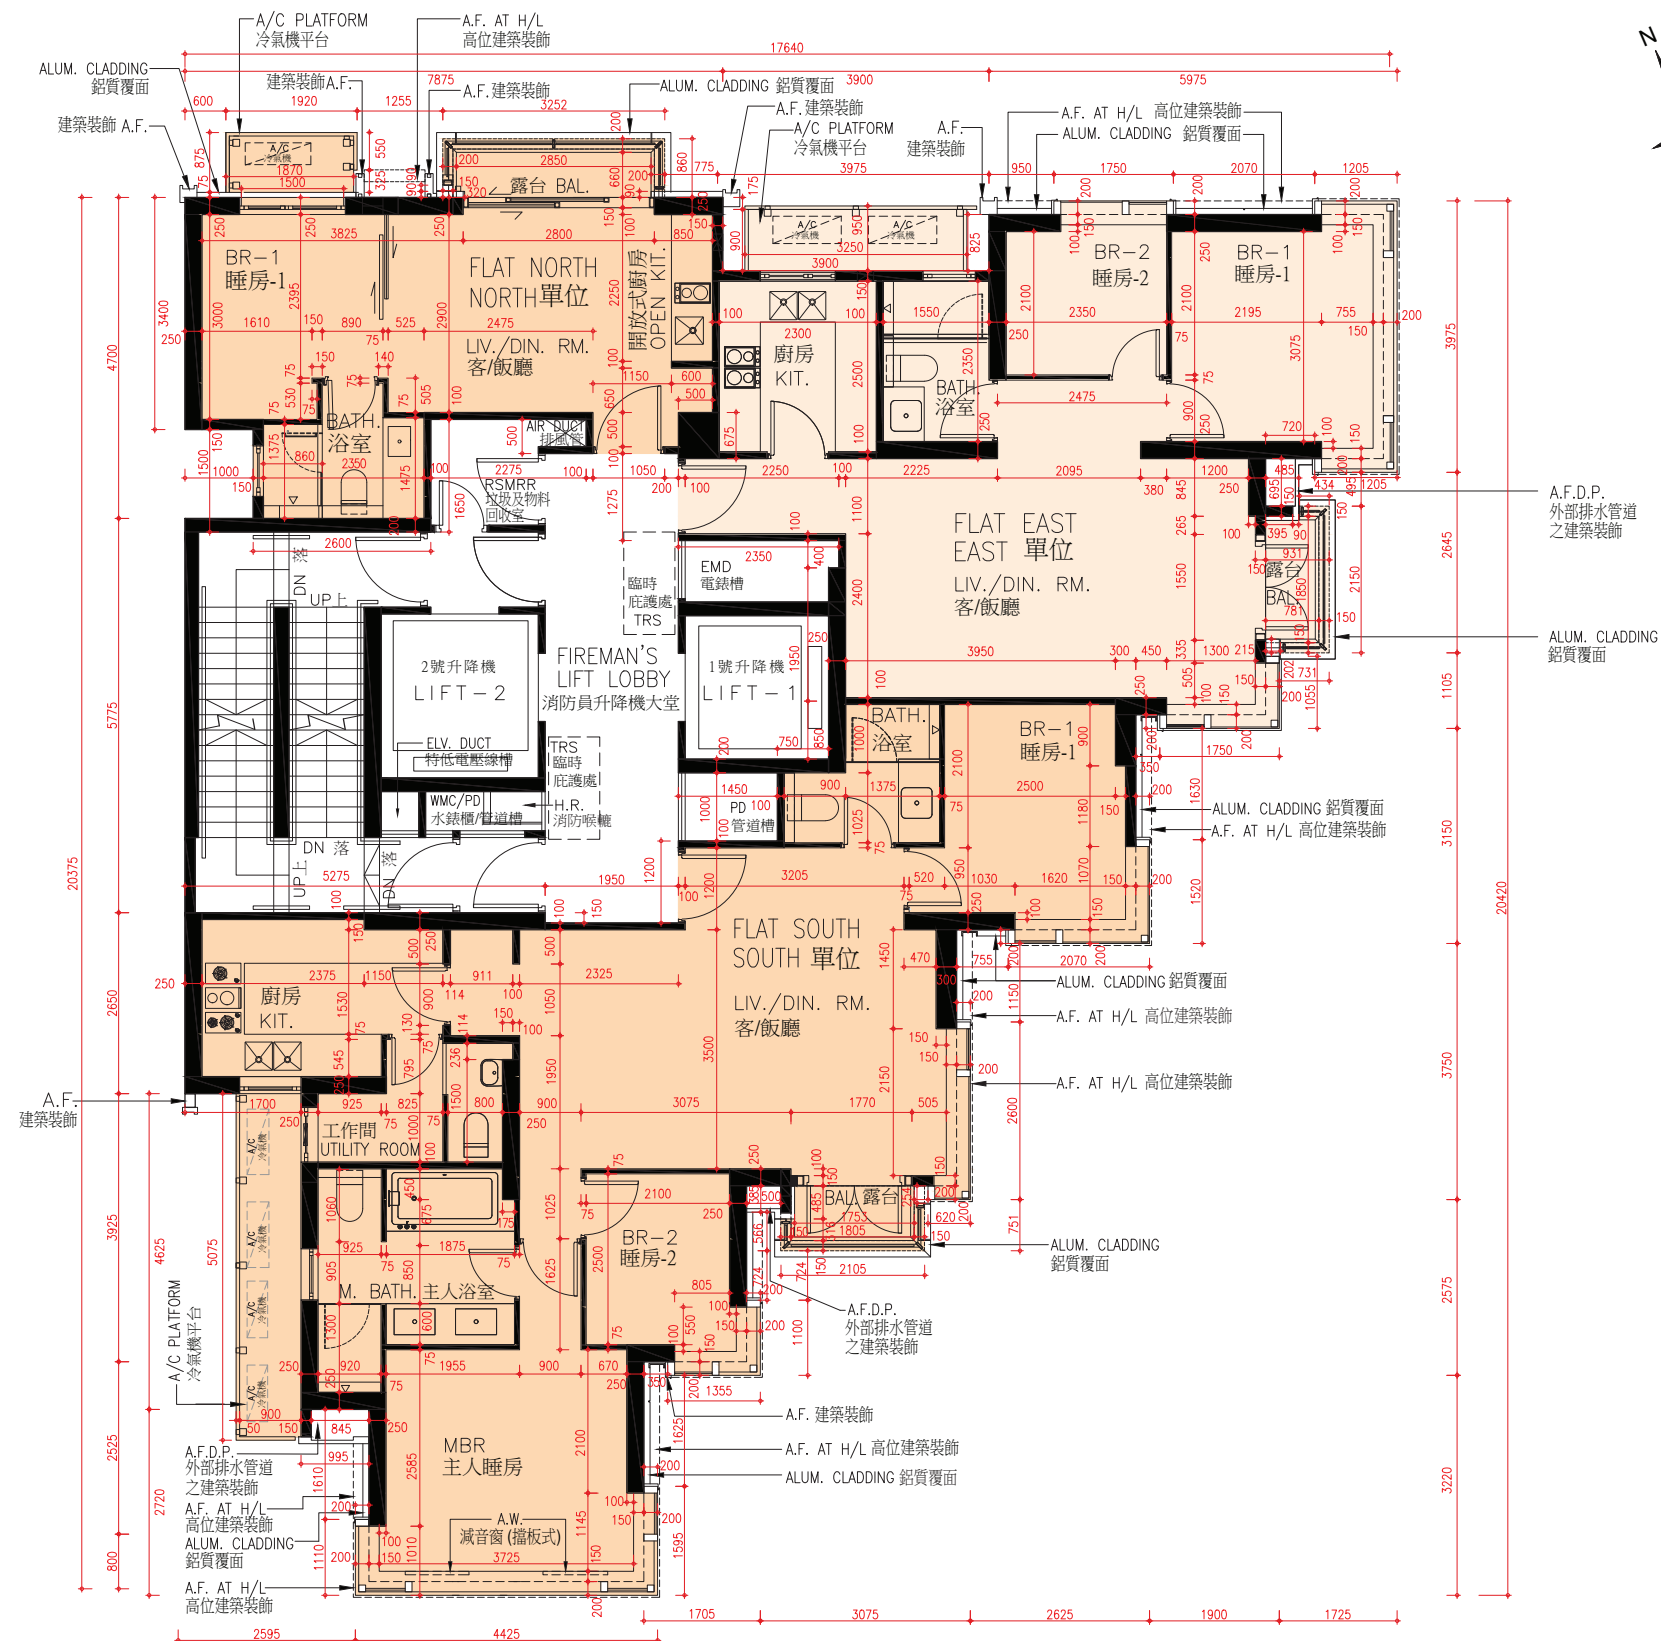

Scale 比例:  0 5m (米)

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖

FLOOR 樓層	FLAT 單位	THE THICKNESS OF THE FLOOR SLABS (EXCLUDING PLASTER) OF EACH RESIDENTIAL PROPERTY (MM) 每個住宅物業的樓板（不包括灰泥）的厚度（毫米）	THE FLOOR-TO-FLOOR HEIGHT OF EACH RESIDENTIAL PROPERTY (MM) 每個住宅物業的層與層之間的高度（毫米）
22/F - 23/F & 25/F 22 樓至 23 樓及 25 樓	NORTH	150, 200	3150, 3150#, 3150@, 3150^
	EAST	150, 200	3150, 3150#, 3150@, 3150^, 3150*
	SOUTH	150, 200	3150, 3150#, 3150!, 3150◇, 3150^

INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 50(mm)
@ INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 200(mm)
◇ INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 250(mm)
! INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 300(mm)
^ INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 350(mm)
* INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 450(mm)

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. This situation and section 10(2)(e) of Part 1 of Schedule 1 to the Residential Properties (First-hand Sales) Ordinance is not applicable for this Development.

Notes:

1. The dimensions in the floor plans are all structural dimensions in millimetre.
2. Please refer to page 27 of this sales brochure for legend of the terms and abbreviations as shown on the floor plans of residential properties in the Development.
3. The floor-to-floor height refer to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.

包括本層地台跌級樓板之跌級深度50 (毫米)
@包括本層地台跌級樓板之跌級深度200 (毫米)
◇ 包括本層地台跌級樓板之跌級深度250 (毫米)
! 包括本層地台跌級樓板之跌級深度300 (毫米)
^ 包括本層地台跌級樓板之跌級深度350 (毫米)
* 包括本層地台跌級樓板之跌級深度450 (毫米)

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。此情況及《一手住宅物業銷售條例》附表1第1部第10(2)(e)條不適用於此發展項目。

備註：


1. 樓面平面圖所列之尺寸數字為以毫米標示之建築結構尺寸。
2. 請參閱本售樓說明書第27頁之圖例以協助閱讀此部分的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。
3. 每個住宅物業的層與層之間的高度指該層之石屎地台面與上一層石屎地台之高度距離。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖

26/F - 27/F FLOOR PLAN

26 樓至 27 樓平面圖

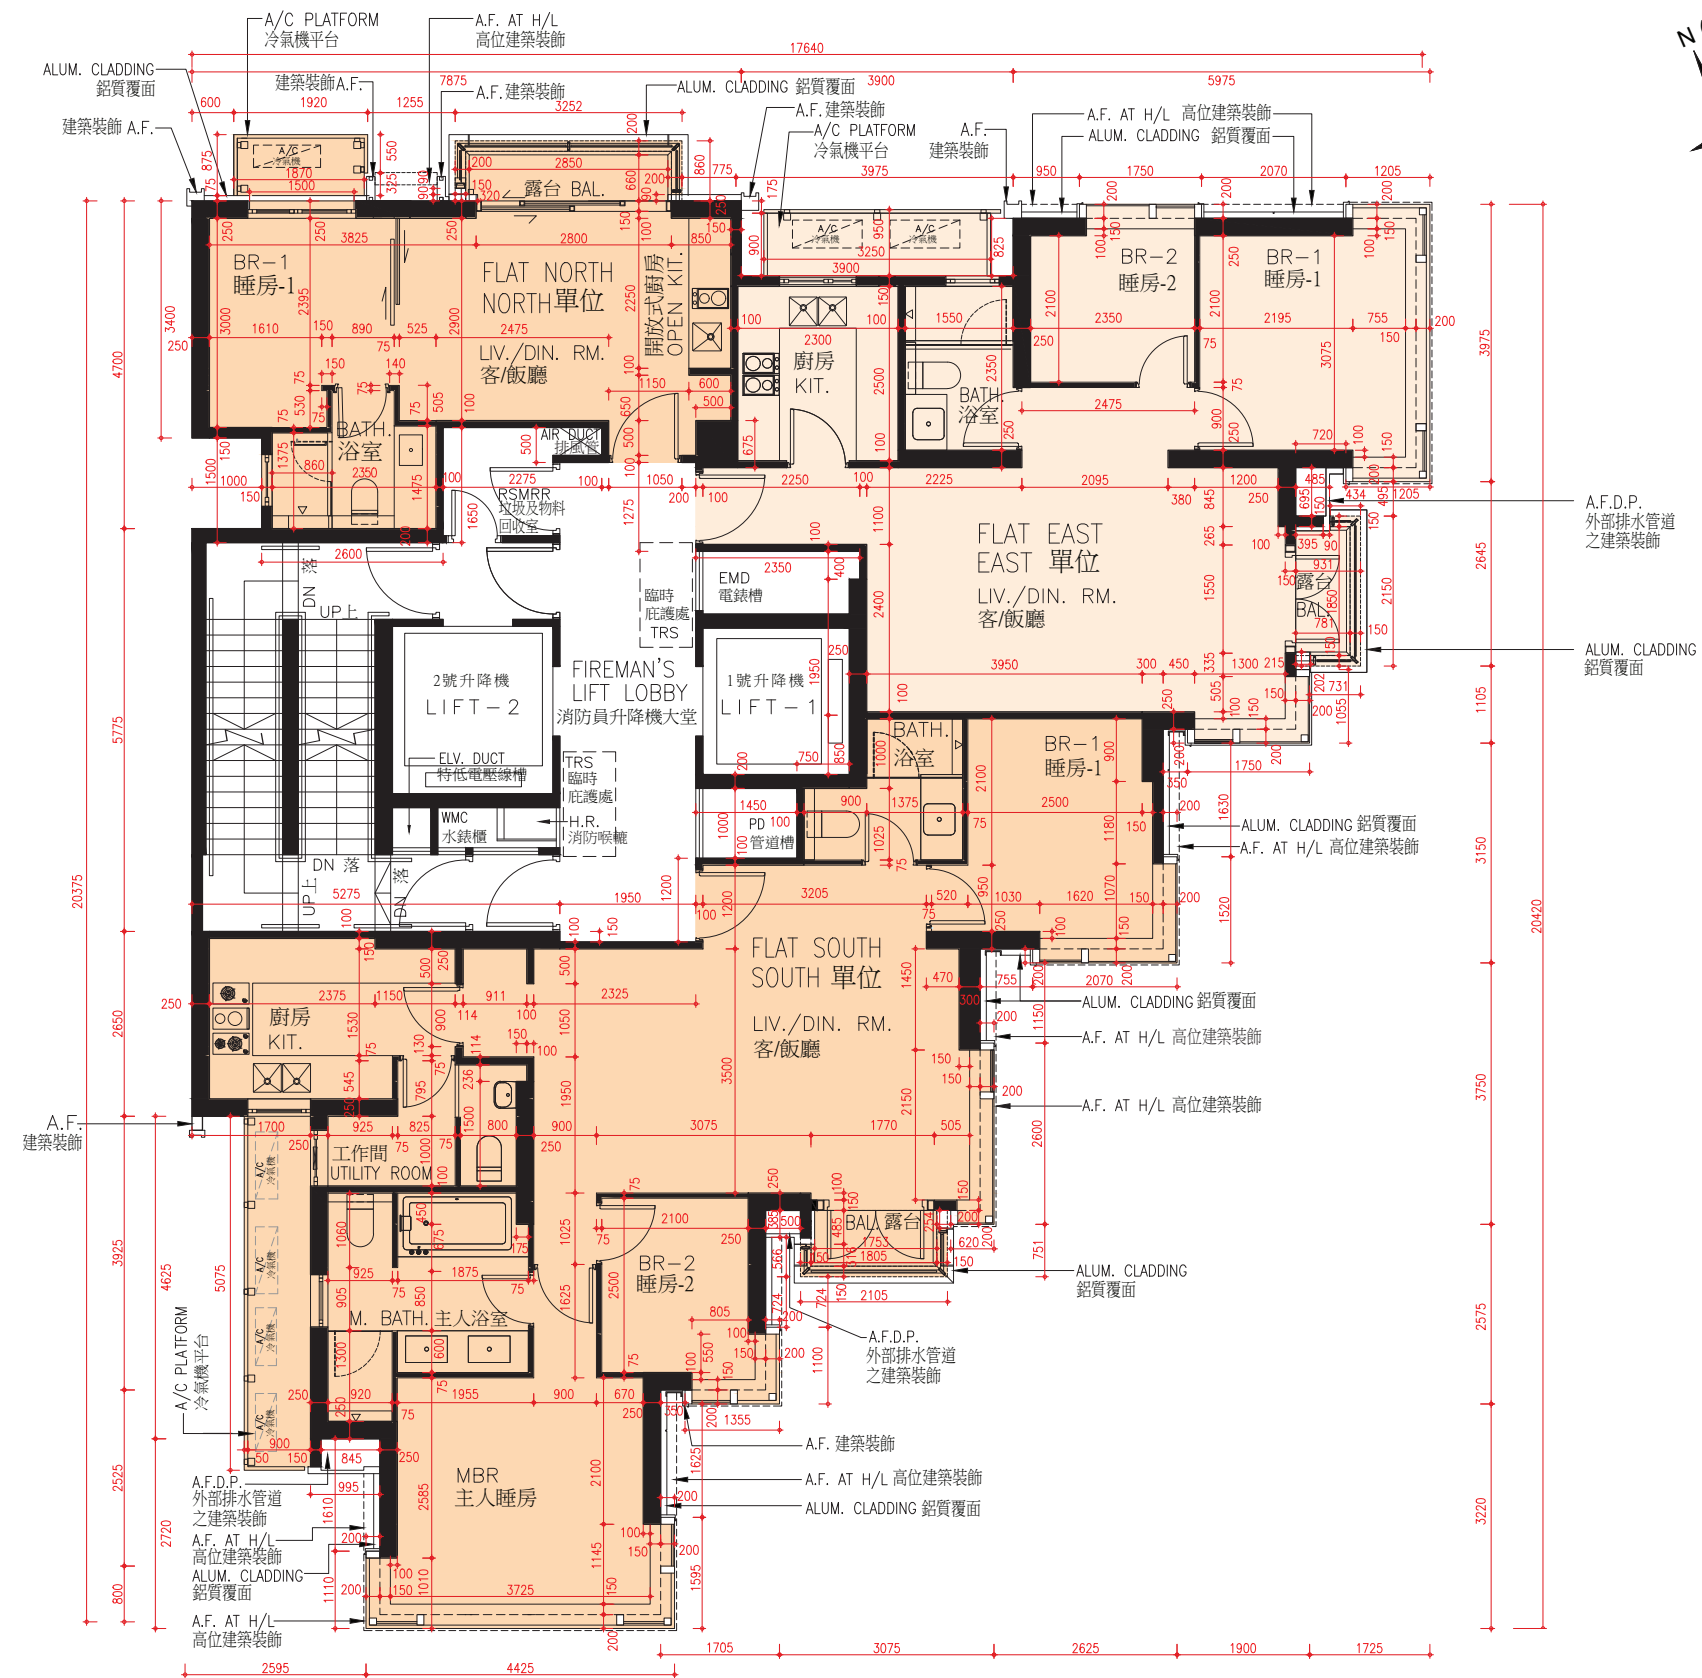

Scale 比例: 0 5m (米)

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖

FLOOR 樓層	FLAT 單位	THE THICKNESS OF THE FLOOR SLABS (EXCLUDING PLASTER) OF EACH RESIDENTIAL PROPERTY (MM) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	THE FLOOR-TO-FLOOR HEIGHT OF EACH RESIDENTIAL PROPERTY (MM) 每個住宅物業的層與層之間的高度 (毫米)
26/F 26樓	NORTH	150, 200	3150, 3150#, 3150@, 3150^
	EAST	150, 200	3150, 3150#, 3150@, 3150^, 3150*
	SOUTH	150, 200	3150, 3150#, 3150!, 3150◇, 3150^
27/F 27樓	NORTH	150, 200	3025, 3325, 3375#, 3375^, 3525@, 3675^
	EAST	150, 200	2875, 2975, 3025, 3175@, 3325, 3375#, 3525@, 3675^, 3775*
	SOUTH	150, 200	3025, 3075, 3325, 3375, 3375#, 3375!, 3500^, 3575^, 3625!, 3625^

INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 50(mm)
@ INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 200(mm)
◇ INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 250(mm)
! INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 300(mm)
^ INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 350(mm)
* INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 450(mm)

包括本層地台跌級樓板之跌級深度50 (毫米)
@包括本層地台跌級樓板之跌級深度200 (毫米)
◇ 包括本層地台跌級樓板之跌級深度250 (毫米)
! 包括本層地台跌級樓板之跌級深度300 (毫米)
^ 包括本層地台跌級樓板之跌級深度350 (毫米)
* 包括本層地台跌級樓板之跌級深度450 (毫米)

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. This situation and section 10(2)(e) of Part 1 of Schedule 1 to the Residential Properties (First-hand Sales) Ordinance is not applicable for this Development.

- Notes:
1. The dimensions in the floor plans are all structural dimensions in millimetre.
 2. Please refer to page 27 of this sales brochure for legend of the terms and abbreviations as shown on the floor plans of residential properties in the Development.
 3. The floor-to-floor height refer to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。
此情況及《一手住宅物業銷售條例》附表1第1部第10(2)(e)條不適用於此發展項目。

- 備註：
1. 樓面平面圖所列之尺寸數字為以毫米標示之建築結構尺寸。
 2. 請參閱本售樓說明書第27頁之圖例以協助閱讀此部分的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。
 3. 每個住宅物業的層與層之間的高度指該層之石屎地台面與上一層石屎地台之高度距離。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖

FLOOR 樓層	FLAT 單位	THE THICKNESS OF THE FLOOR SLABS (EXCLUDING PLASTER) OF EACH RESIDENTIAL PROPERTY (MM) 每個住宅物業的樓板（不包括灰泥）的厚度（毫米）	THE FLOOR-TO-FLOOR HEIGHT OF EACH RESIDENTIAL PROPERTY (MM) 每個住宅物業的層與層之間的高度（毫米）
28/F 28樓	EAST	150, 200	3250, 3500, 3800!, 3850^, 3950*
	SOUTH	150, 200	3250, 3500, 3750◇, 3800^

◇ INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 250(mm)
! INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 300(mm)
^ INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 350(mm)
* INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 450(mm)

◇ 包括本層地台跌級樓板之跌級深度250 (毫米)
! 包括本層地台跌級樓板之跌級深度300 (毫米)
^ 包括本層地台跌級樓板之跌級深度350 (毫米)
* 包括本層地台跌級樓板之跌級深度450 (毫米)

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. This situation and section 10(2)(e) of Part 1 of Schedule 1 to the Residential Properties (First-hand Sales) Ordinance is not applicable for this Development.

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。此情況及《一手住宅物業銷售條例》附表1第1部第10(2)(e)條不適用於此發展項目。

Notes:

- 1. The dimensions in the floor plans are all structural dimensions in millimetre.
- 2. Please refer to page 27 of this sales brochure for legend of the terms and abbreviations as shown on the floor plans of residential properties in the Development.
- 3. The floor-to-floor height refer to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.

備註：


- 1. 樓面平面圖所列之尺寸數字為以毫米標示之建築結構尺寸。
- 2. 請參閱本售樓說明書第27頁之圖例以協助閱讀此部分的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。
- 3. 每個住宅物業的層與層之間的高度指該層之石屎地台面與上一層石屎地台之高度距離。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖

29/F FLOOR PLAN

29 樓平面圖

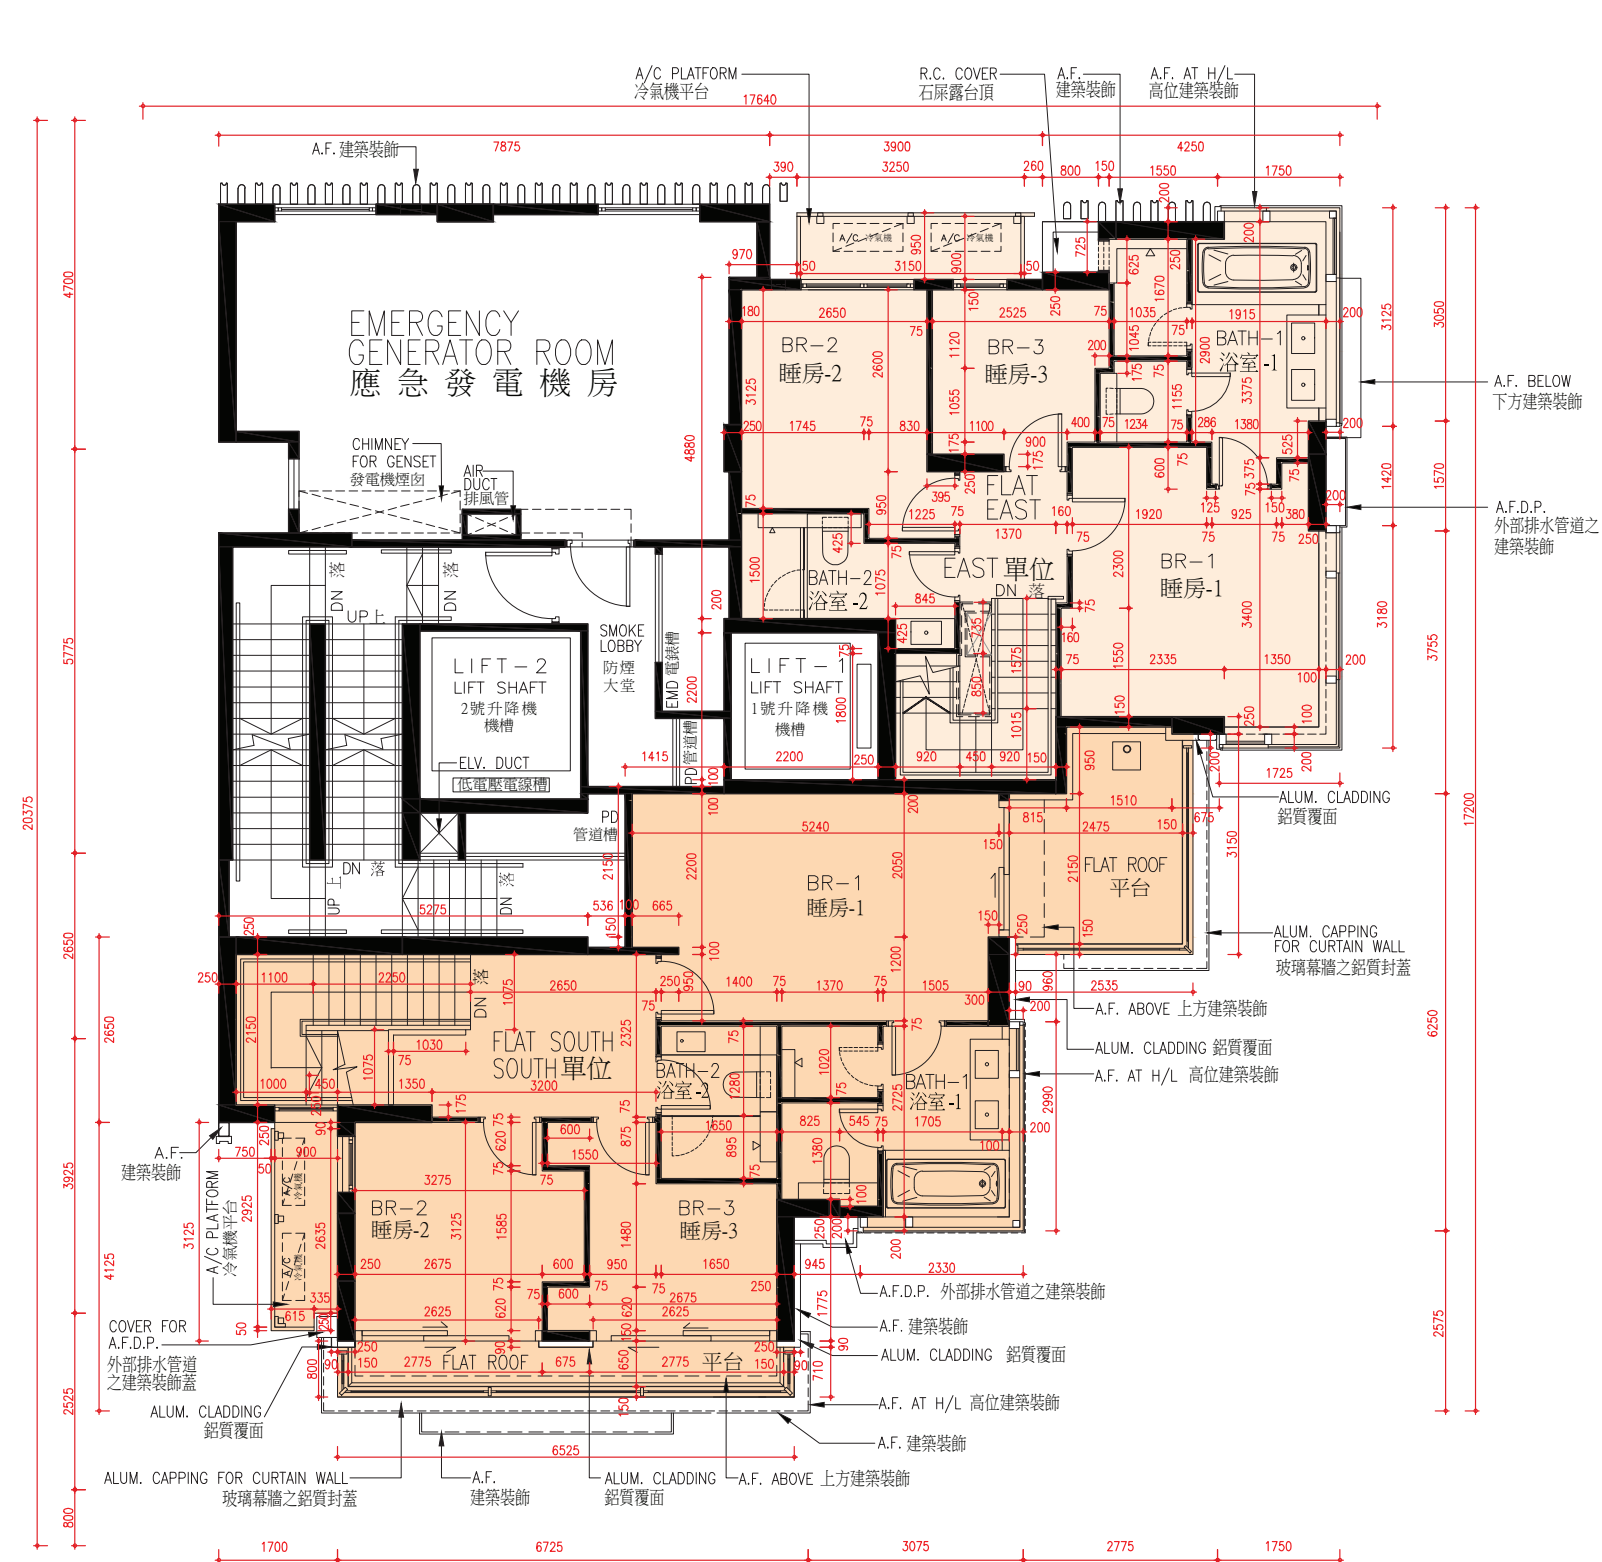

Scale 比例: 0 5m (米)

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT
發展項目的住宅物業的樓面平面圖

FLOOR 樓層	FLAT 單位	THE THICKNESS OF THE FLOOR SLABS (EXCLUDING PLASTER) OF EACH RESIDENTIAL PROPERTY (MM) 每個住宅物業的樓板（不包括灰泥）的厚度（毫米）	THE FLOOR-TO-FLOOR HEIGHT OF EACH RESIDENTIAL PROPERTY (MM) 每個住宅物業的層與層之間的高度（毫米）
29/F 29樓	EAST	150, 200	3325, 3625, 3875◇
	SOUTH	150, 200	3325, 3625

◇ INCLUSIVE OF THE SUNKEN DEPTH OF THE SUNKEN SLAB ON THE FLOOR OF THIS FLOOR 250(mm)

◇ 包括本層地台跌級樓板之跌級深度250 (毫米)

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. This situation and section 10(2)(e) of Part 1 of Schedule 1 to the Residential Properties (First-hand Sales) Ordinance is not applicable for this Development.

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。此情況及《一手住宅物業銷售條例》附表1第1部第10(2)(e)條不適用於此發展項目。

Notes:

- 1. The dimensions in the floor plans are all structural dimensions in millimetre.
- 2. Please refer to page 27 of this sales brochure for legend of the terms and abbreviations as shown on the floor plans of residential properties in the Development.
- 3. The floor-to-floor height refer to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.

備註：

- 1. 樓面平面圖所列之尺寸數字為以毫米標示之建築結構尺寸。
- 2. 請參閱本售樓說明書第27頁之圖例以協助閱讀此部分的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。
- 3. 每個住宅物業的層與層之間的高度指該層之石屎地台面與上一層石屎地台之高度距離。