
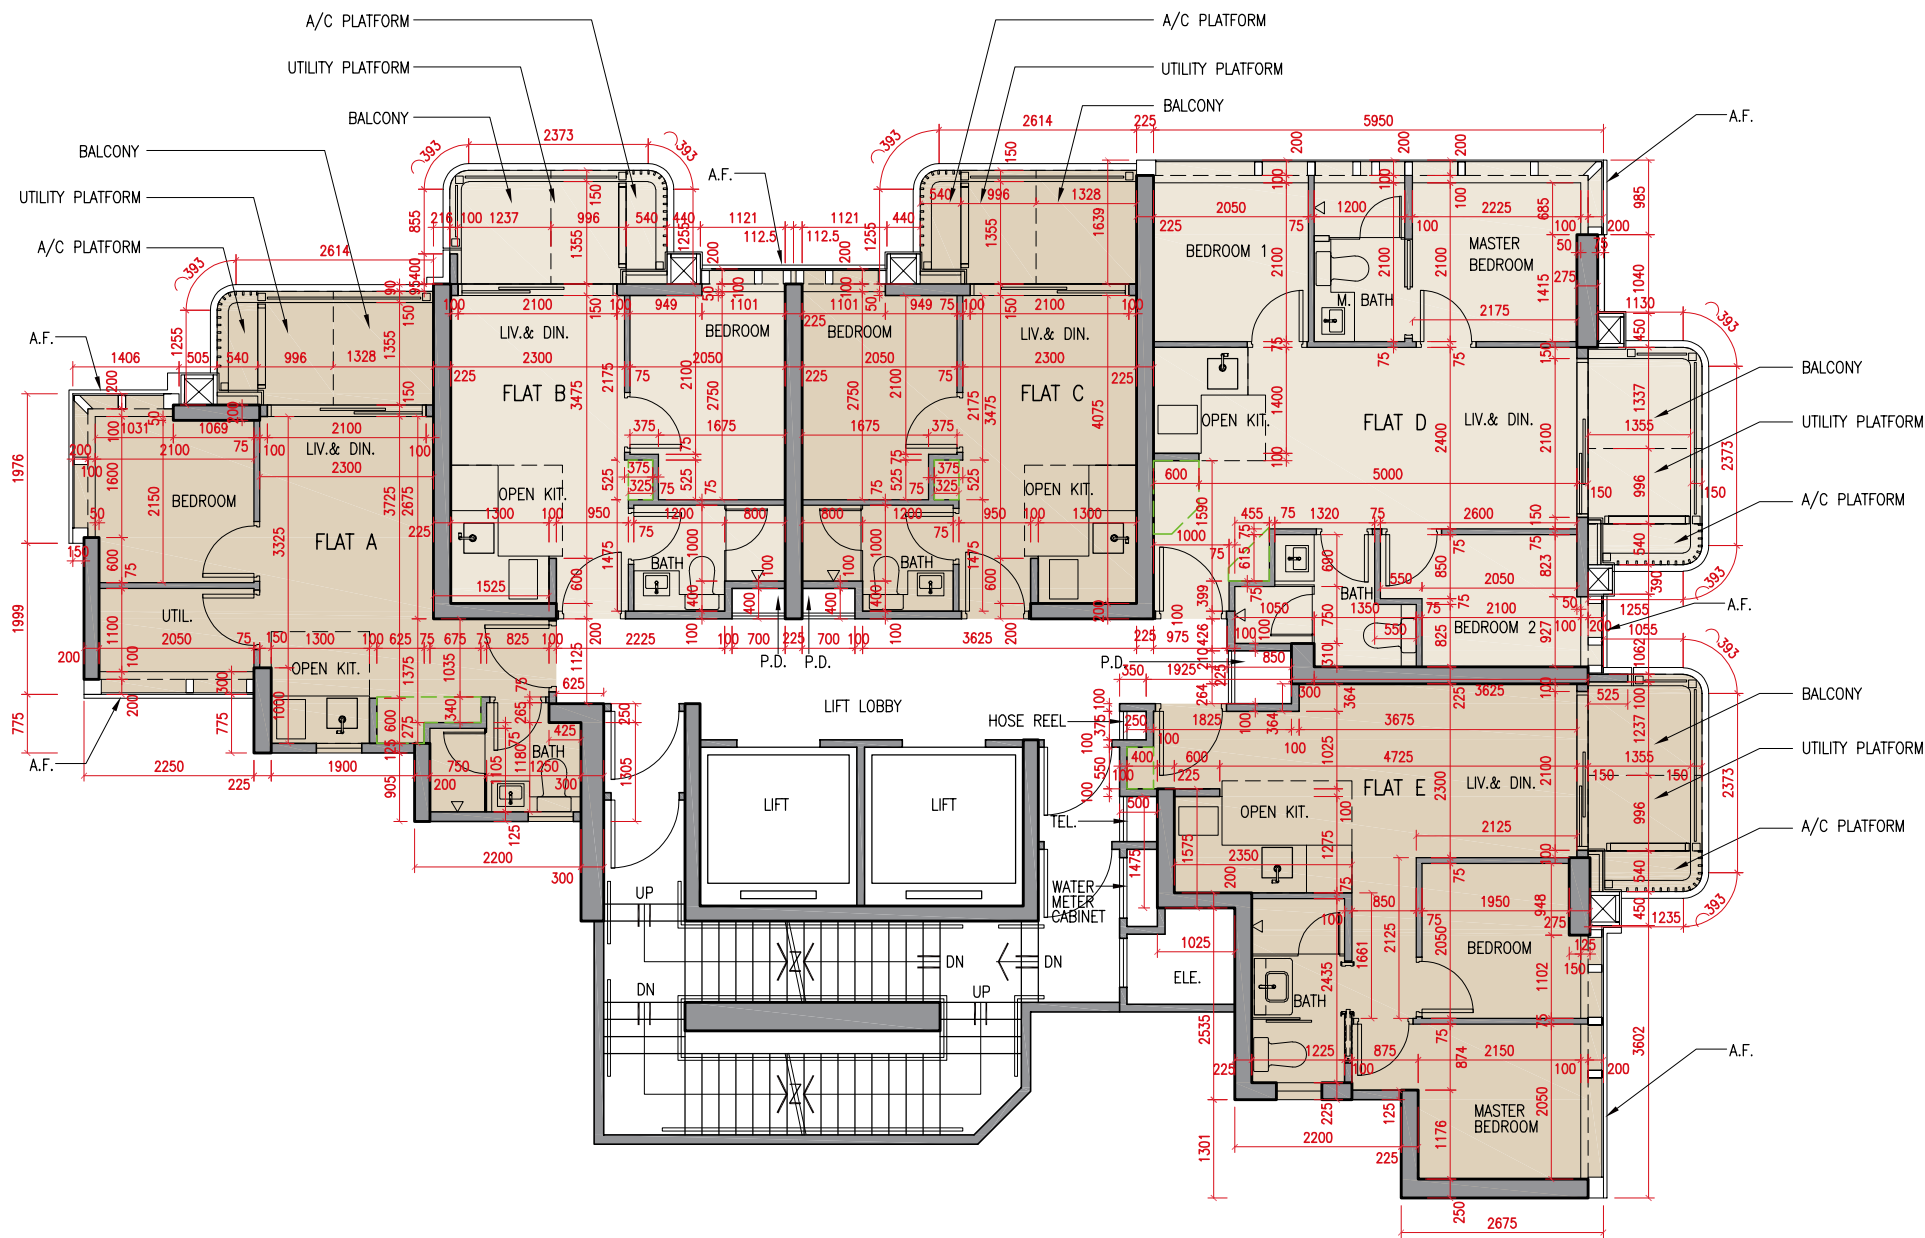


FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖

5/F - 12/F, 15/F - 23/F and 25/F - 28/F (4/F, 13/F, 14/F and 24/F are omitted)

5樓至12樓、15樓至23樓及25樓至28樓（不設4樓、13樓、14樓及24樓）



 Built-in Fittings provided in the Flat
 隨單位附送之嵌入式裝置

SCALE 比例
 0 5M/米

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖

Description 描述	Floor 樓層	Flat 單位				
		A	B	C	D	E
Thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板（不包括灰泥）的厚度（毫米）	5/F - 12/F, 15/F - 23/F and 25/F - 27/F (4/F, 13/F, 14/F and 24/F are omitted) 5樓至12樓、15樓至23樓 及25樓至27樓 (不設4樓、13樓、14樓及24樓)	150	150	150	150	150
Floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (mm) 每個住宅物業的層與層之間的高度 (指該樓層之石屎地台面與上一層石屎地台面之高度距離) (毫米)		3500 [◇] , 3500	3500 [▽] , 3500 [△] , 3500	3500 [▽] , 3500 [△] , 3500	3500 [☆] , 3500 [▽] , 3500 [□] , 3500 [△] , 3500	3500 [◇] , 3500
Thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板（不包括灰泥）的厚度（毫米）	28/F 28樓	150	150	150	150	150
Floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (mm) 每個住宅物業的層與層之間的高度 (指該樓層之石屎地台面與上一層石屎地台面之高度距離) (毫米)		3500, 3600 [◇]	3450 [△] , 3500, 3700 [▽] , 3800 [△]	3450 [△] , 3500, 3700 [▽] , 3800 [△] , 4050 [▽]	3500, 3800 [△] , 3850 [□] , 4050 [▽] , 4100 [☆]	3100, 3500, 3550 [◇]

△ Inclusive of the sunken depth of the sunken slab on the floor of this floor (300mm)
□ Inclusive of the sunken depth of the sunken slab on the floor of this floor (350mm)
◇ Inclusive of the sunken depth of the sunken slab on the floor of this floor (450mm)
▽ Inclusive of the sunken depth of the sunken slab on the floor of this floor (550mm)
☆ Inclusive of the sunken depth of the sunken slab on the floor of this floor (600mm)

包括本層地台跌級樓板之跌級深度（300 毫米）
包括本層地台跌級樓板之跌級深度（350 毫米）
包括本層地台跌級樓板之跌級深度（450 毫米）
包括本層地台跌級樓板之跌級深度（550 毫米）
包括本層地台跌級樓板之跌級深度（600 毫米）

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors (Note: This statement as required under section 10(2)(e) of Part 1 of Schedule 1 to the Residential Properties (First-hand Sales) Ordinance is not applicable to the Development).
因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大（備註：此根據《一手住宅物業銷售條例》附表1第1部第10(2)(e)條規定之陳述並不適用於本發展項目）。

Remarks :
1. The dimensions in the floor plans are all structural dimensions in millimetre and rounded off to the nearest integer.
2. Please refer to the first page of this section for legend of the terms and abbreviations shown in the floor plan.
3. The internal ceiling height within residential properties may vary due to structural, architectural and/or decoration design variations.

備註：
1. 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸，並以四捨五入至整數。
2. 平面圖中顯示之名詞及簡稱之圖例請參閱本節之首頁。
3. 住宅物業之天花高度將會因應其結構、建築及/或裝修設計上的差異而有所不同。